


Install the Cabinet Member

1. Mark a horizontal line in the cabinet sidewall at least 5/8" [15.9mm] above the cabinet floor or at least 5/8" [15.9mm] below the top of the drawer side. Mark a point on the line 2-3/8" [60.2mm] in from the cabinet front. This will position the slide flush with the cabinet opening. For inset drawers, add the drawer front thickness to the 2-3/8" [60.2mm] dimension. See Figure 1.

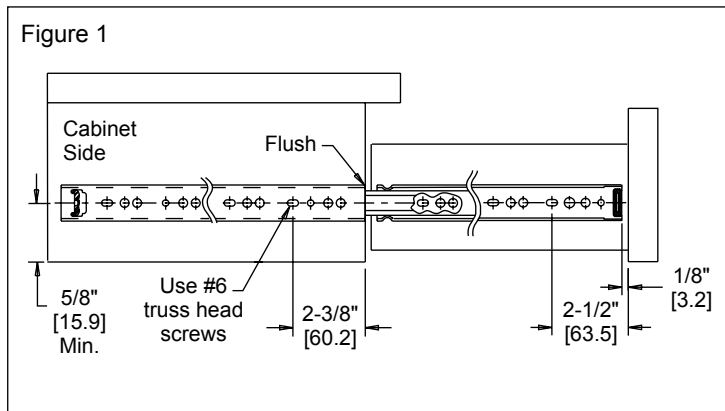

2. Measure the distance between the front and rear horizontal slots on the slide. Mark this measurement on the horizontal line beginning at the first mark.
3. Install #6 truss head screw through the front and rear horizontal slots. Adjust for horizontal position.
4. Install screws in round holes, front and rear of cabinet member. For longer slides (18" [450mm] and over), install additional screws in the central holes.

Install the Drawer Member

1. Mark a horizontal line on the drawer side in line with the slide center line.
2. Mark a point on the line 2-1/2" [63.5mm] back from the drawer front. Measure the distance between the front and rear horizontal slots on the slide. Mark this measurement on the horizontal line beginning at the first mark.
3. Install a screw through the first horizontal slot. See Figure 1.
4. Install screw and adjust location of drawer.
5. Install screws in the round holes, front and rear of drawer member. For longer slides (18" [450mm] and over), install additional screws in the central holes.

NOTE: To access the additional mounting holes in the cabinet and drawer members of the slide, it is necessary to move the intermediate member to line up the access hole and the mounting hole.

Complete your slide order for model 2601 by specifying the following:

200 Pair C 2601 -18 D

Total Slides Required _____

Slide Finish _____

Slide Model _____

Slide Length _____

Optional Polybag Packaging _____

Packaging

Distributor (D) Pack: All lengths are packaged 10 pair per box. Polybag includes one pair of slides and installation sheet.

Bulk (P) Pack: All lengths are packaged 15 pair per box.

Specifications

Slide members: Cold rolled steel
 Ball retainers: Cold rolled steel
 Ball bearings: Carburized steel
 RoHs Compliant

Note: Specifications, materials, prices, terms, and delivery are subject to change without notice.

Accuride

ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue
 Santa Fe Springs, CA 90670

TEL (562) 903-0200
 FAX (562) 903-0208

www accuride.com

Manufacturing, Engineering, and Sales

United States • Germany • Japan • Mexico • United Kingdom • China