


# Flush Hex Blind Stand Off

# Product Specification Sheet

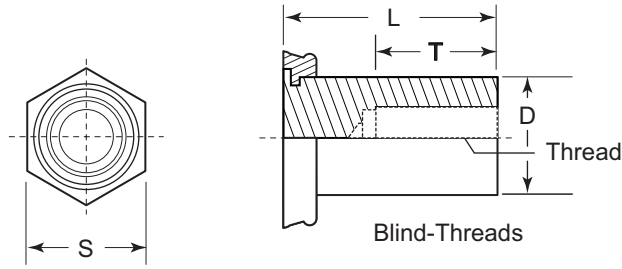

Thread Size		4-40	4-40	6-32	6-32	8-32	10-32
Hole In Sheet +.003 -.005		0.166	0.213	0.213	0.281	0.281	0.281
Diameter - D +.000 -.005		0.165	0.212	0.212	0.280	0.280	0.280
Hex Dimension - S (Nominal)		0.188	0.250	0.250	0.313	0.313	0.313
Depth - T	Length - L	Part Suffix	Part Suffix	Part Suffix	Part Suffix	Part Suffix	Part Suffix
5/32	0.313	440-10	6440-10	632-10	8632-10	832-10	1032-10
	0.375	440-12	6440-12	632-12	8632-12	832-12	1032-12
3/16	0.438	440-14	6440-14	632-14	8632-14	832-14	1032-14
1/4	0.500	440-16	6440-16	632-16	8632-16	832-16	1032-16
	0.563	440-18	6440-18	632-18	8632-18	832-18	1032-18
	0.625	440-20	6440-20	632-20	8632-20	832-20	1032-20
3/8	0.688	440-22	6440-22	632-22	8632-22	832-22	1032-22
	0.750	440-24	6440-24	632-24	8632-24	832-24	1032-24
	0.813	440-26	6440-26	632-26	8632-26	832-26	1032-26
	0.875	440-28	6440-28	632-28	8632-28	832-28	1032-28
	0.937	440-30	6440-30	632-30	8632-30	832-30	1032-30
	1.000	440-32	6440-32	632-32	8632-32	832-32	1032-32
	1.063	440-34	6440-34	632-34	8632-34	832-34	1032-34

Note:

Example:

Description:

Material:

Thread:

Part numbers in table are incomplete. Add the prefix which is applicable to the material you require.

Part Number: .....BFBSOS-440-24

Stainless Steel • #440 Thread size • Length (L) of 24/32" (.75")

Maximum recommended panel hardness:

BFBSO.....Rockwell B-80

BFBSOS.....Rockwell B-70

BFBSOA.....Rockwell B-50

BFBSO – Carbon Steel, Heat Treated, Zinc Plated With Clear Chromate

BFBSOS – Austenitic Stainless Steel, Passivated ASTM A380

BFBSOA – 7075-T6 Aluminum

Unified Standard Class 2B MIL-S-7742



## Buckeye Fasteners Company

5250 West 164th Street • Brook Park, Ohio 44142-1597

(800) 437-1689 • Fax: (216) 267-3228


buckeyefasteners.com • info@buckeyefasteners.com

© 2015 Buckeye Fasteners Company - All Rights Reserved



# Flush Hex Clinching Stand Off

# Product Specification Sheet

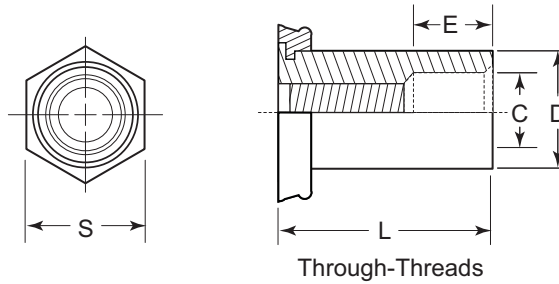

Thread Size		4-40	4-40	6-32	6-32	8-32	10-32
Hole In Sheet +.003 -.005		0.166	0.213	0.213	0.281	0.281	0.281
Diameter +.000 -.005	D	0.165	0.212	0.212	0.280	0.280	0.280
Hex Dimension (Nominal)	S	0.188	0.250	0.250	0.313	0.313	0.313
Counter-bore Diameter	C	0.125	0.125	0.156	0.156	0.188	0.203
Depth E	Length L	Part Suffix	Part Suffix	Part Suffix	Part Suffix	Part Suffix	Part Suffix
None	0.125	440-4	6440-4	632-4	8632-4	832-4	1032-4
	0.188	440-6	6440-6	632-6	8632-6	832-6	1032-6
	0.250	440-8	6440-8	632-8	8632-8	832-8	1032-8
	0.313	440-10	6440-10	632-10	8632-10	832-10	1032-10
3/16	0.375	440-12	6440-12	632-12	8632-12	832-12	1032-12
	0.438	440-14	6440-14	632-14	8632-14	832-14	1032-14
	0.500	440-16	6440-16	632-16	8632-16	832-16	1032-16
	0.563	440-18	6440-18	632-18	8632-18	832-18	1032-18
5/16	0.625	440-20	6440-20	632-20	8632-20	832-20	1032-20
	0.688		6440-22	632-22	8632-22	832-22	1032-22
	0.750		6440-24	632-24	8632-24	832-24	1032-24
	0.813		6440-26	632-26	8632-26	832-26	1032-26
7/16	0.875		6440-28	632-28	8632-28	832-28	1032-28

Note: Part numbers in table are incomplete. Add the prefix which is applicable to the material you require.  
 Example: Part Number: BFBSOS-440-24  
 Description: Stainless Steel • #440 Thread size • Length (L) of 24/32" (.75")  
 Maximum recommended panel hardness:  
 BFSO ..... Rockwell B-80  
 BFSOS ..... Rockwell B-70  
 BFSOA ..... Rockwell B-50  
 Material: BFSO – Carbon Steel, Heat Treated, Zinc Plated with Clear Chromate  
 BFSOS – Austenitic Stainless Steel Passivated ASTM A380  
 BFSOA – 7075-T6 Aluminum  
 Thread: Class 2B, MIL-S-7742



## Buckeye Fasteners Company

5250 West 164th Street • Brook Park, Ohio 44142-1597

(800) 437-1689 • Fax: (216) 267-3228


buckeyefasteners.com • info@buckeyefasteners.com

© 2015 Buckeye Fasteners Company - All Rights Reserved



Request Info 1-800-453-1692  
[www.aboveboardelectronics.com](http://www.aboveboardelectronics.com)

**Metric Flush  
Hex Blind  
Stand Off**

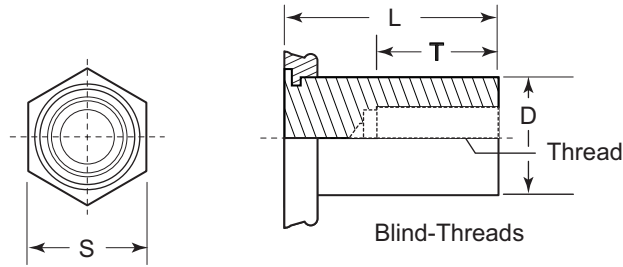

**Product  
Specification  
Sheet**

Thread Size		M3	M3	M3.5	M4	M5
Hole in Sheet +.08 -.00		4.2	5.4	5.4	7.2	7.2
Diameter +0.0 - 0.13	D	4.19	5.38	5.38	7.11	7.11
Hex Size	S	4.8	6.4	6.4	7.9	7.9
Depth T ±0.4	Length L	Part Suffix	Part Suffix	Part Suffix	Part Suffix	Part Suffix
4.0	8	M3-8	3.5M3-8	M3.5-8	M4-8	M5-8
	10	M3-10	3.5M3-10	M3.5-10	M4-10	M5-10
5.0	12	M3-12	3.5M3-12	M3.5-12	M4-12	M5-12
	14	M3-14	3.5M3-14	M3.5-14	M4-14	M5-14
6.5	16	M3-16	3.5M3-16	M3.5-16	M4-16	M5-16
9.5	18	M3-18	3.5M3-18	M3.5-18	M4-18	M5-18
	20		3.5M3-20	M3.5-20	M4-20	M5-20
	22		3.5M3-22	M3.5-22	M4-22	M5-22
	25		3.5M3-25	M3.5-25	M4-25	M5-25



Note:  
require. Example:  
Description:

Part numbers in table are incomplete. Add the prefix which is applicable to the material you

Part Number: BFBSOS-M3.5-20  
Stainless Steel • M3.5 Thread size • Length (L) of 20mm  
Maximum recommended panel hardness:

BFBSO.....Rockwell B-80  
BFBSOS .....Rockwell B-70  
BFBSOA .....Rockwell B-50

Material:

BFBSO – Carbon Steel, Heat Treated, Zinc Plated With Clear Chromate  
BFBSOS – Austenitic Stainless Steel, Passivated  
BFBSOA – 7075-T6 Aluminum

Thread:

6H ISO Metric



**Buckeye Fasteners Company**

5250 West 164th Street • Brook Park, Ohio 44142-1597


**(800) 437-1689 • Fax: (216) 267-3228**

buckeyefasteners.com • info@buckeyefasteners.com

© 2015 Buckeye Fasteners Company - All Rights Reserved



**Metric  
Flush Hex  
Clinching  
Stand Off**

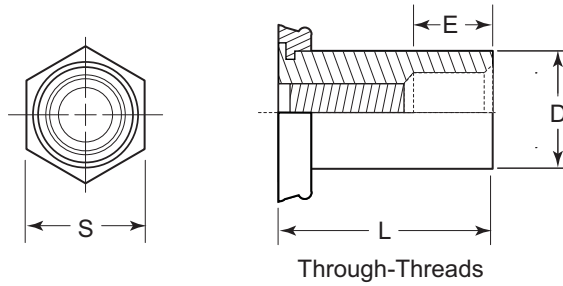

**Product  
Specification  
Sheet**

Thread Size		M3	M3	M3.5	M4	M5
Hole in Sheet +0.08 -0.00		4.2	5.4	5.4	7.2	7.2
Diameter +0.0 - 0.13	D	4.19	5.38	5.38	7.11	7.11
Hex Size	S	4.8	6.4	6.4	7.9	7.9
Depth T ±0.4	Length L	Part Suffix	Part Suffix	Part Suffix	Part Suffix	Part Suffix
None	3	M3-3	3.5M3-3	M3.5-3	M4-3	M5-3
	4	M3-4	3.5M3-4	M3.5-4	M4-4	M5-4
	6	M3-6	3.5M3-6	M3.5-6	M4-6	M5-6
4.0	8	M3-8	3.5M3-8	M3.5-8	M4-8	M5-8
	10	M3-10	3.5M3-10	M3.5-10	M4-10	M5-10
5.0	12	M3-12	3.5M3-12	M3.5-12	M4-12	M5-12
	14	M3-14	3.5M3-14	M3.5-14	M4-14	M5-14
6.5	16		3.5M3-16	M3.5-16	M4-16	M5-16
9.5	18		3.5M3-18	M3.5-18	M4-18	M5-18
	20				M4-20	M5-20
	22				M4-22	M5-22



Note:  
require. Example:  
Description:

Part numbers in table are incomplete. Add the prefix which is applicable to the material you

Part Number: BFSOS-M3.5-20  
Stainless Steel • M3.5 Thread size • Length (L) of 20mm  
Maximum recommended panel hardness:

BFSO .....Rockwell B-80  
BFSOS.....Rockwell B-70  
BFSOA.....Rockwell B-50

Material:

BFSO – Carbon Steel, Heat Treated, Zinc Plated With Clear Chromate  
BFSOS – Austenitic Stainless Steel, Passivated  
BFSOA – 7075-T6 Aluminum

Thread:

6H ISO Metric



**Buckeye Fasteners Company**

5250 West 164th Street • Brook Park, Ohio 44142-1597

**(800) 437-1689 • Fax: (216) 267-3228**

buckeyefasteners.com • info@buckeyefasteners.com

© 2015 Buckeye Fasteners Company - All Rights Reserved



Request Info

1-800-453-1692  
[www.aboveboardelectronics.com](http://www.aboveboardelectronics.com)