




Broaching-Type Standoffs

Series CKFE & CKFSE



CKFE and CKFSE threaded and non-threaded standoffs allow screws to be inserted through multiple layered boards for stacked assemblies. All fasteners from Captive Fastener are identical to industry standards so that they can be fed through standard automatic insertion equipment.

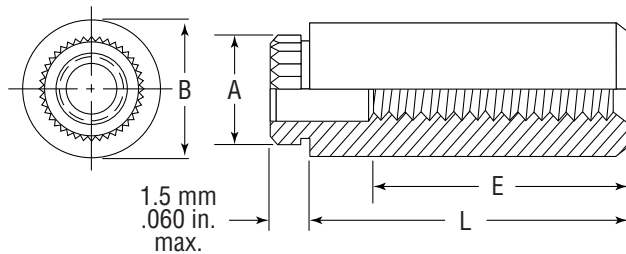

† Not stocked, available on special order. Note: Min Panel Thickness .060 in. (1.5mm)

Series	Material	Finish
CKFE	Carbon Steel	Electro Tin Plating ASTM B545 Class B (Zinc* Clear Optional)
CKFSE	300 Series Stainless Steel	Passivated ASTM A967

* See Finish Spec. on Page 6.

Thread: Internal 2B, ANSI B1.1 (6H, ANSI/ASME B1.13M).

Use in: CKFE - Materials with Rockwell Hardness of B-60 or less.

CKFSE - Materials with Rockwell Hardness of B-70 or less.

Part Number Structure:

CKFE 440-4



Note: CKFE & CKFSE broaching standoffs are designed for unplated through-holes. When installed in plated through-holes, a hole tolerance of +.005 - .001 in. (+.13 - .03 mm) should be used.

When used in plated through-holes performance will be reduced and plating may be damaged by knurl.

Dimensions & Specifications

INCH (in.)	Thru Hole Thread Size +.004 -.003	Part Number		L Length ±.005 in.								A	B	+.003 -.000	Min.
		Carbon Steel	Stainless Steel	.125	.250	.375	.500	.625	.750	.875	±.003	±.005			
	#4-40	CKFE440	CKFSE440	-4	-8	-12	-16	-20	-24 [†]			.184	.219	.166	.17
	#6-32	CKFE632	CKFSE632	-4	-8	-12	-16	-20	-24 [†]	-28 [†]		.231	.281	.213	.22
	.116	CKFE116	CKFSE116	-4	-8	-12	-16	-20	-24 [†]			.184	.219	.166	.17
	.143	CKFE143	CKFSE143	-4	-8	-12	-16	-20	-24 [†]	-28 [†]		.231	.281	.213	.22
E=minimum thread length				Full				.375 ±.015							
METRIC (mm)	Thread Size +.10 -.08	Part Number		Length ±.13 mm								A	B	+.08 -.00	Min.
		Carbon Steel	Stainless Steel	3	4	6	8	10	12	14	16	±.08	±.13		
	M3x0.5	CKFEM3	CKFSEM3	-3	-4	-6	-8	-10	-12	-14	-16 [†]	4.68	5.56	4.22	4.4
	3.6	CKFE3.6	CKFSE3.6	-3	-4	-6 [†]	-8 [†]	-10 [†]	-12 [†]	-14 [†]	-16 [†]	5.87	7.14	5.41	5.5
	4.2	CKFE4.2	CKFSE4.2	-3 [†]	-4 [†]	-6 [†]	-8 [†]	-10 [†]	-12 [†]	-14 [†]	-16 [†]	6.86	8.74	6.4	7.1
E=minimum thread length (where applicable)				Full				9.5 ±.4							

Installation & Performance Data

	Thread Size	Fiberglass .060 in. (1.5 mm)		
		Installation Force (lbs.)	Pushout (lbs.)	Torque-out (in.-lbs.)
INCH (in.)	#4-40	400	65	14
	#6-32	500	80	29
METRIC (mm)	Thread Size	Installation Force (kN)	Pushout (N)	Torque-out (N•m)
	M3	2.22	295	1.35

