


SPECIALTY HINGES



Our heavy-duty latch hinge line is available in standard assembly, and with an optional pin hold back feature (-HB) to lock pin in the retracted position for easier assembly and quick removal of doors.

HEAVY DUTY LATCH HINGES


| Part No. | Material | Finish | Thickness | A | B | C | D |
|----------------|-----------|--------|-----------|------|------|------|------|
| 9296LH-02 | Steel | Zinc | .125 | 2.00 | .375 | 1.12 | 1.25 |
| 9296LH-02-HB** | Steel | Zinc | .125 | 2.00 | .375 | 1.12 | 1.25 |
| 9296LH-32 | Stainless | None | .125 | 2.00 | .375 | 1.12 | 1.25 |
| 9296LH-32-HB** | Stainless | None | .125 | 2.00 | .375 | 1.12 | 1.25 |
| 9296RH-02 | Steel | Zinc | .125 | 2.00 | .375 | 1.12 | 1.25 |
| 9296RH-02-HB** | Steel | Zinc | .125 | 2.00 | .375 | 1.12 | 1.25 |
| 9296RH-32 | Stainless | None | .125 | 2.00 | .375 | 1.12 | 1.25 |
| 9296RH-32-HB** | Stainless | None | .125 | 2.00 | .375 | 1.12 | 1.25 |
| 9297LH-02 | Steel | Zinc | .187 | 3.00 | .50 | 1.25 | 1.50 |
| 9297LH-02-HB** | Steel | Zinc | .187 | 3.00 | .50 | 1.25 | 1.50 |
| 9297LH-32 | Stainless | None | .187 | 3.00 | .50 | 1.25 | 1.50 |
| 9297LH-32-HB** | Stainless | None | .187 | 3.00 | .50 | 1.25 | 1.50 |
| 9297RH-02 | Steel | Zinc | .187 | 3.00 | .50 | 1.25 | 1.50 |
| 9297RH-02-HB** | Steel | Zinc | .187 | 3.00 | .50 | 1.25 | 1.50 |
| 9297RH-32 | Stainless | None | .187 | 3.00 | .50 | 1.25 | 1.50 |
| 9297RH-32-HB** | Stainless | None | .187 | 3.00 | .50 | 1.25 | 1.50 |

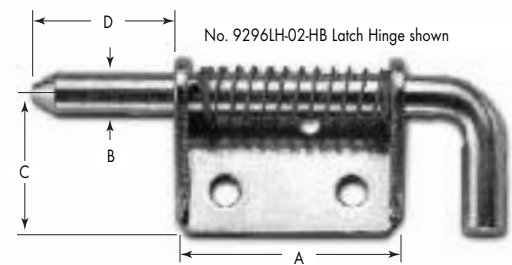


Doors come right off with Guden's un-hinge. It is a quick-release hinge that can be mounted in any position and requires no tools. An easy squeeze of the knurled knobs retracts the spring-loaded pins from the knuckles to release the leaves. Precise manufacturing standards eliminate excess side and end play for minimum door movement.

UN-HINGES - STAINLESS STEEL


| Part No. | Thickness | A | B | C | D | E | Holes |
|-------------|-----------|------|------|------|-----|-----|-------|
| 9201-32 | .050 | 4.00 | .250 | 1.00 | .41 | .37 | No |
| H9201-32* | .050 | 4.00 | .250 | 1.00 | .41 | .37 | Yes |
| 9202-32 | .050 | 4.00 | N/A | 1.00 | N/A | .37 | No |
| H9202-32* | .050 | 4.00 | N/A | 1.00 | N/A | .37 | Yes |
| 9300LH-32 | .050 | 1.75 | .250 | 1.00 | .53 | .50 | No |
| H9300LH-32* | .050 | 1.75 | .250 | 1.00 | .53 | .50 | Yes |
| 9300RH-32 | .050 | 1.75 | .250 | 1.00 | .53 | .50 | No |
| H9300RH-32* | .050 | 1.75 | .250 | 1.00 | .53 | .50 | Yes |

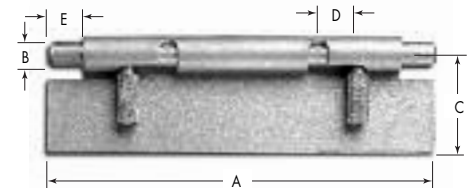

No. 9201-32 Un-Hinge shown

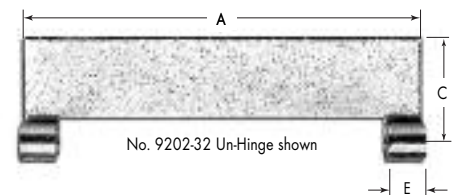

No. 9202-32 Un-Hinge shown

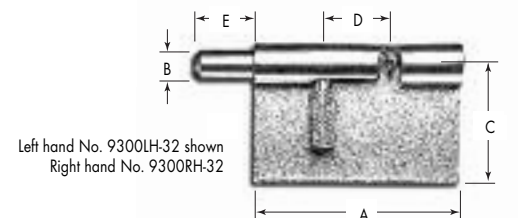

Left hand No. 9300LH-32 shown
Right hand No. 9300RH-32

* Supplied from stock with 3 pre-punched .128 diameter holes.

** Supplied with pin hold back feature.

