



## Heyco® Aluminum Solderless Connectors

- **Compact design—lightweight yet strong.**
- Electro-tin plated for low contact resistance and corrosion protection when used with copper conductors.
- Require no special installation tools.
- UL and CSA certified for use with copper and aluminum conductors.
- Ports are marked with catalog description and conductor range.

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	PART DIMENSIONS							
			A Width		B Length		C Height		Bolt Size	
			in.	mm.	in.	mm.	in.	mm.	in.	mm.

### Single Conductor


4-14	<b>1863</b>	A35	.50	12,7	1.06	26,9	.50	12,7		
2-14	<b>1864</b>	A90	.50	12,7	1.16	29,5	.56	14,2	1/4	6,4
1/0-14	<b>1884</b>	A125	.63	15,9	1.47	37,3	.78	19,8		

**NEW!**

### Two Conductors

2-14	<b>1864-2</b>	A90-2	.91	23,0	1.16	29,5	.56	14,2	1/4	6,4
1/0-14	<b>1884-2</b>	A125-2	1.12	28,4	1.47	37,3	.78	19,8		

**NEW!**

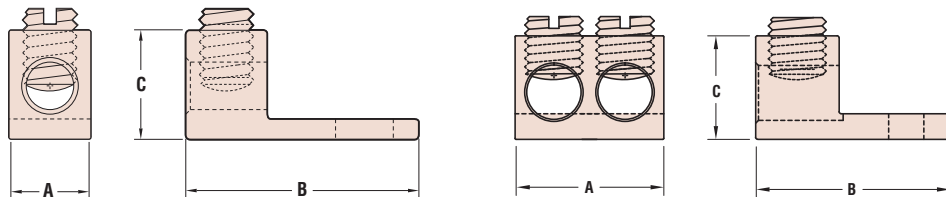


## Heyco® Copper Lug Connectors

### Copper Single Hole Offset Lugs

- **100% conductivity for highest efficiency.**
- Completely reusable.
- Require no special installation tools.
- UL listed and CSA certified for use with copper conductors.
- Marked with catalog description and conductor range.

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	CURRENT RATING AMPS	HEIGHT WITH MAX. WIRE		PART DIMENSIONS				Bolt Size	
				in.	mm.	A Tang Width		B Length		in.	mm.
						in.	mm.	in.	mm.	in.	mm.

\*Not CSA

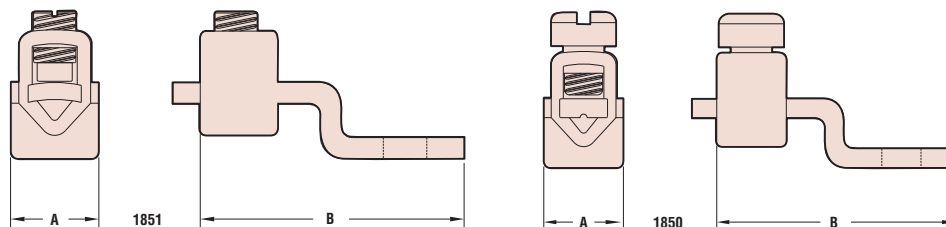

*Quick Specs*

Materials  
Certifications

Flammability Rating

6061-T6 aluminum alloy; electrolytic copper

UL Listed under Underwriters' Laboratories File E80121

CSA Certified by the Canadian Standards Association File 242954 & 246619  
94V-0