



Heyco® Double D Hole Plugs

For Mounting Holes with Flats


Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)

| PANEL DIMENSIONS | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | |
|-------------------------|------|--------------------------|------|----------|-------|----------------|--------------------|------|---------------------|------|
| C Mounting Hole Dia. | | D To Prevent Rotation | | Black | White | | A Head Diameter | | B Overall Height | |
| in. | mm. | in. | mm. | | | in. | mm. | in. | mm. | |
| .375 | 9,5 | .345 | 8,8 | 2617 | 2618 | DP 375* | .468 | 11,9 | .406 | 10,3 |
| .437 | 11,1 | .390 | 9,9 | 2488 | 2489 | DD 437-390 | .531 | 13,5 | | |
| .500 | 12,7 | .445 | 11,3 | 2491 | 2492 | DD 500-445 | .554 | 14,7 | | |
| .562 | 14,3 | .530 | 13,5 | 2494 | 2495 | DD 562-530 | .656 | 16,7 | | |
| .625 | 15,9 | .550 | 14,0 | 2497 | 2498 | DD 625-550 | .728 | 18,5 | | |
| .750 | 19,1 | .625 | 15,9 | 2503 | 2504 | DD 750-625 | .921 | 23,4 | | |
| .875 | 22,2 | .770 | 19,5 | 2509 | 2510 | DD 875-770 | 1.016 | 25,8 | .453 | 11,5 |
| | | | | 2511 | - | DD 875-770-9** | .938 | 23,8 | | |
| 1.109 | 28,2 | 1.000 | 25,4 | 2717 | 2718 | DD 1109-1000 | 1.218 | 30,9 | | |
| 2.000 | 50,8 | 1.875 | 47,6 | 2959 | 2963 | DD 2000-1875 | 2.170 | 55,1 | .478 | 12,1 |

Standard colors black and white. Consult Heyco for other colors.

*On installation, DP 375 Locking Fingers must be aligned with Mounting Hole Flats.

**Smaller than standard Head Diameter, for clearance situations.

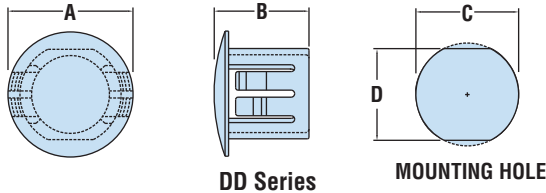

DD Series

MOUNTING HOLE


- Close unwanted Strain Relief mounting holes or other double faced or Double D holes punched or molded with two opposing flats.
- Convex, matte finish head tapers to a thin edge.
- Quick and easy installation.
- Lock firmly in panels up to .125" (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.

Heyco® Rectangular Blanking Plugs

| Maximum Thickness | PANEL DIMENSIONS | | | | PART NO. | DESCRIPTION | PART DIMENSIONS | | | | |
|-------------------|---------------------------|-----|--------------------------|------|----------|-------------|----------------------|------------|---------------------|------|------|
| | C Mounting Hole Length | | D Mounting Hole Width | | | | A Head Dimensions | | B Overall Height | | |
| in. | mm. | in. | mm. | in. | mm. | Black | | in. | mm. | in. | mm. |
| .04 | 1,0 | .27 | 6,9 | .29 | 7,4 | 2512 | RP 69-74* | .37 x .37 | 9,4 x 9,4 | .330 | 8,4 |
| .14 | 3,5 | .37 | 9,5 | .51 | 13,0 | 3388 | RP 95-130 | .46 x .87 | 11,8 x 22 | .41 | 10,5 |
| | | | | 1.02 | 26,0 | 3389 | RP 95-260 | .46 x 1.38 | 11,8 x 35 | | |
| .10 | 2,5 | .45 | 11,5 | .51 | 13,9 | 1890 | RP 115-139 | .58 x .58 | 14,7 x 14,7 | .40 | 10,2 |
| .16 | 4,0 | .69 | 17,5 | .69 | 17,5 | 1892 | RP 175-175 | .83 x .83 | 21,1 x 21,1 | .47 | 11,9 |

NEW!

Standard color black. Consult Heyco for other colors. *Single locking step for Panel Thickness up to .04" (1,0 mm).

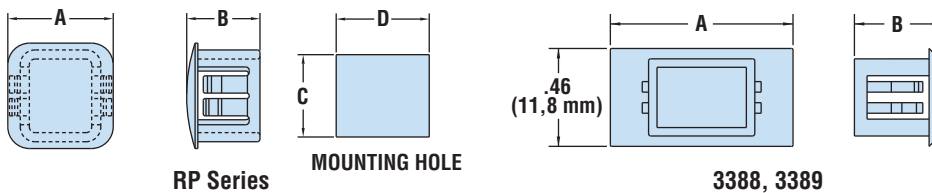

RP Series

MOUNTING HOLE

3388, 3389

- Fill uniquely sized panel holes.
- Blank unused rectangular panel holes.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Consult Heyco for other sizes. Our Axcell Rapid Response team is ready to meet your design requirements.
- **PN 1890** - UR Recognized under the Component Program of Underwriters' Laboratories File E15331.
- **PN 1892** - UR Recognized under the Component Program of Underwriters' Laboratories File E51579 and CSA Certified by the Canadian Standards Association File 8919.

| | |
|---------------------|---|
| Material | Nylon 6/6 |
| Certifications | UL Recognized under the Component Program of Underwriter Laboratories File E51579 (DD only) |
| Flammability Rating | 94V-2 |
| Temperature Range | -40°F (-40°C) to 221°F (105°C) |

Quick Specs