




## Heyco® Ergonomic Plugs for Square Tubing

PSTE Series - Vinyl for Greater Flexibility

- **Flexible, ribbed design** allows quick and easy fingertip installation.
- **Removable without the use of tools** (Traditional glides and tube plugs are designed to be permanent. Their rigid design makes removal very difficult).
- Injection molded for intricate detail and design, with **flexibility**.
- See pages 6-35 and 6-36 for HEYCaps and Plugs for Round Tubing.
- See page 6-40 for Heyco Plugs for Rectangular Tubing.
- Material: Vinyl. Vinyl **decreases mobility** or sliding on floors, helping to keep your application in place.

TUBE DIMENSIONS Inside					PART NO.	DESCRIPTION	PART DIMENSIONS			
Dimension Range		Typical Gauge	A Outside Dimension				B Depth			
Minimum in.	Maximum mm.		Minimum in.	Maximum mm.	in.	mm.	in.	mm.		
.58	14,7	.68	17,3	14 - 20	<b>G5320</b>	PST E-75-14	.75	19,1	.43	10,9
.73	18,5	.83	21,1	10 - 14	<b>G5321</b>	PST E-100-10	1.00	25,4		
.83	21,1	.93	23,6	14 - 20	<b>G5322</b>	PST E-100-14	1.25	31,8	.52	13,2
1.08	27,4	1.18	30,0	14 - 20	<b>G5323</b>	PST E-125-14				
1.23	31,2	1.33	33,8	10 - 14	<b>G5324</b>	PST E-150-10	1.50	38,1	.52	13,2
1.33	33,8	1.43	36,3	14 - 20	<b>G5325</b>	PST E-150-14				
1.73	43,9	1.83	46,5	14 - 20	<b>G5326</b>	PST E-200-10	2.00	50,8		

Standard color black.

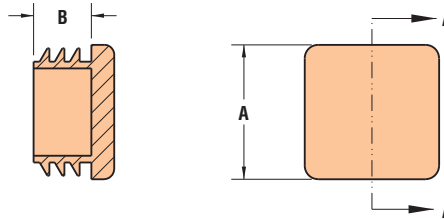


## Heyco® Domed Plugs for Square and Rectangular Tubing

PZTD Series - Ribbed Fit

- Featuring the same external rib design of Heyco PSTR Series Plugs for Square Tubing, but with a Domed finish.
- **Durable construction** ensures exceptional performance on a variety of metal furniture.
- See pages 6-35 and 6-36 for HEYCaps and Plugs for Round Tubing.
- See page 6-40 for Heyco Plugs for Rectangular Tubing.

TUBE DIMENSIONS						PART NO.	DESCRIPTION	PLUG	
A Outside Dimensions		Wall Thickness in.	Typical Gauge	C Depth					
in.	mm.			in.	mm.	in.	mm.		
<b>180° Head</b>									
.75	19,1	.75	19,1	.083 - .035	14 - 20	<b>G5370</b>	PZTD 75-75-14	.50	12,7
.88	22,2	.88	22,2	.083 - .035	14 - 20	<b>G5371</b>	PZTD 88-88-14		
1.19	30,2	2.00	50,8	.065	16	<b>G5372</b>	PZTD 119-200-16	1.00	25,4
<b>Pyramid Head</b>									
2.00	50,8	2.00	50,8	.083 - .035 .134 - .083	14 - 20 10 - 14	<b>G5373</b> <b>G5374</b>	PZTD 200-200-14 PZTD 200-200-10	.75	19,1

Standard color black.

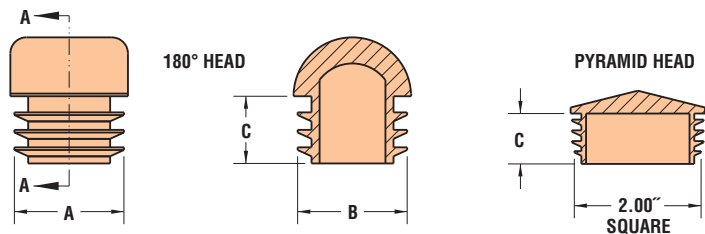

*Quick Specs*

	PSTE	PZTD
Material	Vinyl	LDPE
Maximum Temperature Rating	350°F (177°C)	175°F (79°C)