




Heyco® Feet of Strength

Feet with Push Rivet

PART DIMENSIONS						PANEL DIMENSIONS						PART NO. Black	DESCRIPTION	
A Overall Height in. mm.	B Top Diameter in. mm.		C Bottom Diameter in. mm.		Mounting Hole Diameter in. mm.	Thickness Range Minimum Maximum in. mm.		Thickness Range Minimum Maximum in. mm.						
FSR Series														
NEW!	.16	4,0	.43	10,8	.39	10,0	.142	3,6	.02	0,5	.05	1,2	2519	FSR 16-14-05
									.05	1,2	.08	2,0	2520	FSR 16-14-08
									.06	1,5	.10	2,5	2521	FSR 16-14-10
NEW!									.10	2,5	.14	3,5	2550	FSR 16-14-14
	.17	4,2	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.07	1,8	2522	FSR 17-17-07
NEW!									.07	1,8	.11	2,8	2523	FSR 17-17-11
NEW!									.11	2,9	.15	3,7	2524	FSR 17-17-15
									.15	3,8	.19	4,8	2525	FSR 17-17-19
	.22	5,5	.56	14,2	.53	13,5	.122	3,1	.03	0,8	.07	1,8	2517	FSR 22-12-07
NEW!									.07	1,8	.11	2,8	2518	FSR 22-12-11
NEW!									.02	0,6	.04	1,0	2500	FSR 24-17-04
NEW!							.165	4,2	.04	1,0	.08	2,0	2501	FSR 24-17-08
NEW!	.24	6,0	.59	15,0	.55	14,0			.08	2,0	.12	3,1	2502	FSR 24-17-12
NEW!							.204	5,2	.03	0,8	.05	1,2	2506	FSR 24-21-05
NEW!									.05	1,3	.09	2,3	2507	FSR 24-21-09
NEW!									.03	0,8	.07	1,8	2526	FSR 241-17-07
	.24	6,0	.83	21,0	.79	20,0	.165	4,2	.08	1,9	.11	2,8	2527	FSR 241-17-11
									.11	2,9	.16	4,0	2528	FSR 241-17-16
NEW!									.01	0,3	.03	0,8	2575	FSR 31-17-03
NEW!	.31	8,0	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.08	2,0	2529	FSR 31-17-08
									.08	2,1	.12	3,1	2530	FSR 31-17-12
	.35	9,0	.59	15,0	.55	14,0	.165	4,2	.04	1,0	.08	2,0	2532	FSR 35-17-08
									.08	2,0	.12	3,1	2533	FSR 35-17-12

Standard color black.

- Require only fingertip pressure for fast, easy installation.
- May be released from inside the panel.
- Multiple sizes range in height from .217" (5,5 mm) to .354" (9,0 mm).
- Part Description Key: FSR XX-YY-ZZ where XX = Overall Height (inches), YY = Mounting Hole Diameter (inches) and ZZ = Maximum Panel Thickness (inches)

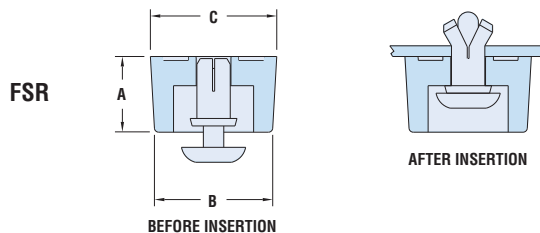

Material Thermoplastic Rubber (TPR)
 Flammability Rating 94-HB
 Temperature Range -30°F (-34°C) to 250°F (121°C)

Quick Specs