




HEYClip™ Hinged Edge Cable Holders

Designed for Rectangular Edge Slot or Through-Hole Mounting - suitable for retrofit applications

- Designed for rectangular mounting hole or edge slot mounting.
- Hinged latch design permits retrofitting into pre-wired applications.
- Route cables and protect them from sharp edges.

WIRE CAPACITY		PANEL DIMENSIONS Thru Hole or Edge Slot						Thickness		PART NO. Natural	DESCRIPTION	PART DIMENSIONS					
in.	mm.	X	Y	Z	W			A	B			in.	mm.	in.	mm.		
CH HE SERIES																	
.77 x .20	19,5 x 5,2	.858	21,8	.421	10,7	.161	4,1	.98	25,0	.031 - .063	0,8 - 1,6	3300	CH HE-25	1.19	30,2	.47	12,0
								1.02	26,0	.079	2,0						
.77 x .47	19,5 x 12,0	.870	22,0	.710	18,0	.200	5,0	.98	25,0	.020 - .063	0,5 - 1,6	3301	CH HE-22	1.22	31,0	.75	19,0

Standard color natural.

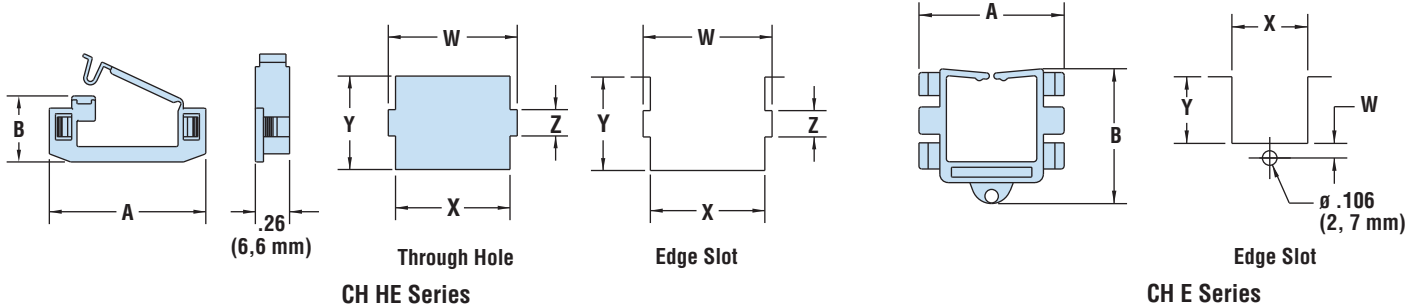

HEYClip™ Edge Cable Holders

Designed for Rectangular Edge Slot Mounting - suitable for retrofit applications



WIRE CAPACITY		PANEL DIMENSIONS Edge Slot Size						Thickness		PART NO. Natural	DESC.	PART DIMENSIONS			
in.	mm.	X	Y	W					A			B	in.	mm.	in.
CH E Series															
.46 x .29	11,6 x 7,4	.551	14,0	.484	12,4	.106	2,7	.031 - .063	0,8 - 1,6	4246	CH E-14	.78	19,8	.64	16,3
								.031 - .063	0,8 - 1,6						
.66 x .59	16,7 x 15,0	.756	19,2	.831	21,1	.098	2,5	.031 - .063	0,8 - 1,6	4247	CH E-19	1.06	26,8	.98	24,9
								.031 - .063	0,8 - 1,6						
.66 x .58	16,8 x 14,7	.827	21,0	.827	21,0	.094	2,4	.031 - .063	0,8 - 1,6	4248	CH E-21	1.13	28,8	.98	24,9
								.031 - .063	0,8 - 1,6						
.90 x .91	22,8 x 23,1	1.063	27,0	1.140	29,0	.118	3,0	.031 - .063	0,8 - 1,6	4249	CH E-27	1.37	34,8	1.31	33,3
								.031 - .063	0,8 - 1,6						

Standard color natural.

Quick
Specs

Material Nylon 6/6
Flammability Rating 94V-2
Temperature Range 32°F (0°C) to 185°F (85°C)