




## HEYClip™ SunRunner® Cable Clip


Double-Compression Design

- Robust double-compression design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000 solar wires. **Also for use with other cables from .20" (5,1 mm) to .30" (7,6 mm) in diameter.**
- Heyco SunRunner clips **may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to **panels.**
- Generous lead-in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Constructed from corrosion resistant 304 stainless steel.
- SunRunner fits panels up to .125" (3,2 mm) thick.
- **SunRunner EZ designed for thicker panels up to .250" (6,4 mm) thick.**
- For additional HEYClips in stainless steel, see pages 1-13 & 1-14.

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (2) Wires	PART NO.	DESCRIPTION	FOOTPRINT A x B		OVERALL HEIGHT C	
Minimum in.	Maximum mm.	Minimum in.	Maximum mm.				in.	mm.	in.	mm.
.055	1,4	.125	3,2	.20" (5,1 mm)- .30" (7,6 mm) each cable	S6405	SunRunner 100 Pack	.97 x .50	24,6 x 12,7	.39	9,9
					S6445	SunRunner Bulk				

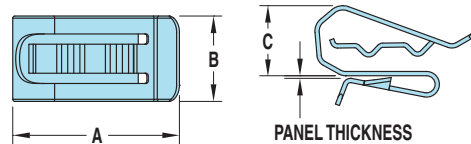

SunRunner®

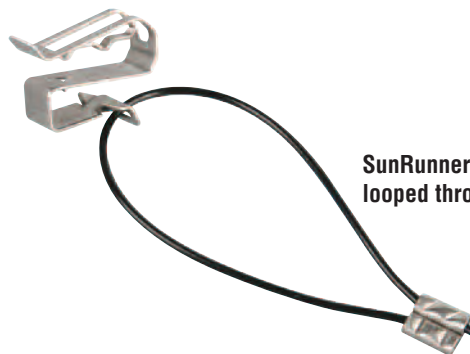

SunRunner® EZ with (optional) SunBundler (page 7-16) looped through slot



## HEYClip™ SunRunner® EZ™ Cable Clip

Double-Compression Design for Panels up to .250" (6,4 mm) Thick

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (2) Wires	PART NO.	DESCRIPTION	FOOTPRINT A x B		OVERALL HEIGHT C	
Minimum in.	Maximum mm.	Minimum in.	Maximum mm.				in.	mm.	in.	mm.
.090	2,3	.250	6,4	.20" (5,1 mm)- .30" (7,6 mm) each cable	S6407	SunRunner® EZ 100 Pack	.97 x .50	24,6 x 12,7	.41	10,4
					S6447	SunRunner® EZ Bulk				

Quick  
Specs

Material .025" thick 304 stainless steel