



# HEYbrid™ Stainless Steel/Co-molded Liquid Tight Cordgrips

## Metric Hubs


**ALL NEW PRODUCTS!**

Don't get SKU'ed: More Cable Range, Fewer SKU's!




*The Ultimate in Liquid Tight Strain Relief Protection*

- HEYCo-molded gripping finger/gland technology accommodates the **widest cable range** over the **fewest sku's**.
- Rolled threads **prevent galling** and allow for multiple assemblies and disassemblies.
- Self-retaining sealing rings eliminate the need for an O-Ring groove, thus **reducing cost**.
- Ideal for corrosive environments.
- Constructed from corrosion resistant 303 stainless steel.
- Resistant to salt water, acids and most chemicals.

CABLE DIA. RANGE				PART NO.	DESCRIPTION	UL or RA	PART DIMENSIONS									
Minimum		Maximum					Black	A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thickness		E Wrenching Nut Flat Size
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.065	1,7	.210	5,3	<b>M6060</b>	RSSCG M12	RA	.473	12,0	1.16	29,5	.32	8,1	.20	5,1	.75	19,0
.115	2,9	.250	6,4	<b>M6061</b>	SSCG M12											
.065	1,7	.230	5,8	<b>M6062</b>	RSSCG M16	RA	.630	16,0	1.25	31,8	.32	8,1	.20	5,1	.83	21,1
.105	2,7	.315	8,0	<b>M6063</b>	SSCG M16											
.095	2,4	.290	7,4	<b>M6066</b>	RSSCG M20	UL	.787	20,0	1.49	37,8	.41	10,4	.20	5,1	1.06	27,0
.170	4,3	.450	11,4	<b>M6067</b>	SSCG M20											
.180	4,6	.400	10,2	<b>M6068</b>	RSSCG LL M20	UL	.787	20,0	1.65	41,9	.41	10,4	.20	5,1	1.25	31,2
.260	6,6	.545	13,8	<b>M6069</b>	SSCG LL M20											
.250	6,4	.490	12,4	<b>M6070</b>	RSSCG M25	UL	.985	25,0	1.89	48,0	.52	13,2	.20	5,1	1.31	33,3
.435	11,1	.705	17,9	<b>M6071</b>	SSCG M25											
.490	12,4	.785	19,9	<b>M6072</b>	RSSCG M32	UL	1.260	32,0	2.23	56,6	.58	14,7	.20	5,1	1.75	44,4
.590	15,0	1.000	25,4	<b>M6073</b>	SSCG M32											

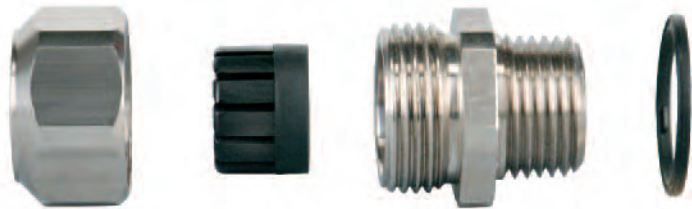

### The HEYCo-molded Finger, Gland and Seat

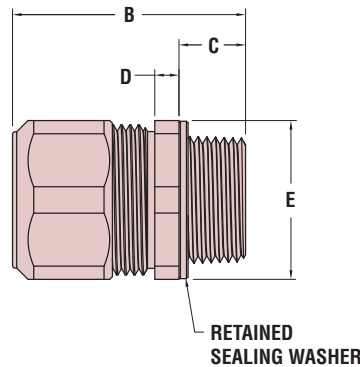

SUGGESTED CLEARANCE HOLE FOR NONTHEADED MOUNTING

*Quick Specs*

Material	303 Stainless Steel Body and sealing nut with nylon 6/6 and TPE co-molded finger/gland assembly SBR Sealing Washer
Certifications	cULus Listed under Underwriters' Laboratories File E51579 cRAus Recognized under Underwriters' Laboratories File E51579
Flammability Rating	94V-2
Temperature Rating	-.4°F (-20°C) to 212°F (100°C)
IP Rating	IP68 (70 PSI, 5 BAR)