



HEYbrid™ Stainless Steel/Co-molded Liquid Tight Cordgrips

PG Hubs

Don't get SKU'ed: More Cable Range, Fewer SKU's!




The Ultimate in Liquid Tight Strain Relief Protection

ALL NEW PRODUCTS!




CABLE DIA. RANGE				PART NO.	DESCRIPTION	UL or RA	PART DIMENSIONS									
Minimum		Maximum					A	B		C		D		E		
in.	mm.	in.	mm.	Clearance Hole Dia.	Max. O.A. Length	Thread Length	Thread Length	Thickness	Wrenching Nut Flat Size	in.	mm.	in.	mm.			
.065	1,7	.210	5,3	M6030	RSSCG PG7	RA	.492	12,5	1.16	29,5	.32	8,1	.20	5,1	.75	19,0
.115	2,9	.250	6,4	M6031	SSCG PG7		.599	15,2	1.25	31,8	.32	8,1	.20	5,1	.83	21,0
.065	1,7	.230	5,8	M6032	RSSCG PG9	RA	.599	15,2	1.25	31,8	.32	8,1	.20	5,1	.83	21,0
.105	2,7	.315	8,0	M6033	SSCG PG9		.804	20,4	1.53	38,9	.41	10,4	.20	5,1	1.06	27,0
.095	2,4	.290	7,4	M6036	RSSCG PG13.5	UL	.804	20,4	1.53	38,9	.41	10,4	.20	5,1	1.06	27,0
.170	4,3	.450	11,4	M6037	SSCG PG13.5		.886	22,5	1.68	42,7	.44	11,2	.20	5,1	1.25	31,2
.180	4,6	.400	10,2	M6038	RSSCG PG16	UL	.886	22,5	1.68	42,7	.44	11,2	.20	5,1	1.25	31,2
.260	6,6	.545	13,8	M6039	SSCG PG16		1.115	28,3	1.89	48,0	.52	13,2	.20	5,1	1.31	33,3
.250	6,4	.490	12,4	M6040	RSSCG PG21	UL	1.115	28,3	1.89	48,0	.52	13,2	.20	5,1	1.31	33,3
.435	11,1	.705	17,9	M6041	SSCG PG21		1.470	37,3	2.23	56,6	.58	14,7	.20	5,1	1.75	44,4
.490	12,4	.785	19,9	M6042	RSSCG PG29	UL	1.470	37,3	2.23	56,6	.58	14,7	.20	5,1	1.75	44,4
.590	15,0	1.000	25,4	M6043	SSCG PG29											

- HEYCo-molded gripping finger/gland technology accommodates the **widest cable range** over the **fewest sku's**.
- Rolled threads **prevent galling** and allow for multiple assemblies and disassemblies.
- Self-retaining sealing rings eliminate the need for an O-Ring groove, thus **reducing cost**.
- Ideal for corrosive environments.
- Constructed from corrosion resistant 303 stainless steel.
- Resistant to salt water, acids and most chemicals.

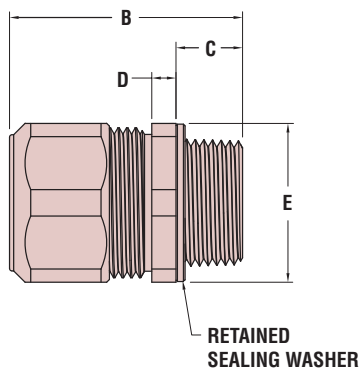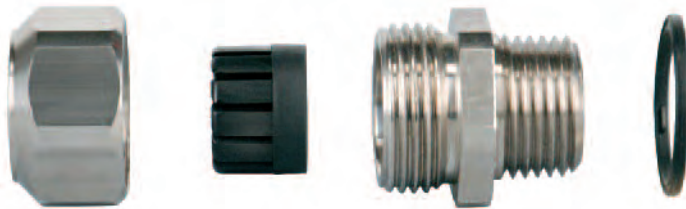

The HEYCo-molded Finger, Gland and Seat



Material	303 Stainless Steel Body and sealing nut with nylon 6/6 and TPE co-molded finger/gland assembly SBR Sealing Washer
Certifications	cULus Listed under Underwriters' Laboratories File E51579 cRAus Recognized under Underwriters' Laboratories File E51579
Flammability Rating	94V-2
Temperature Rating	-.4°F (-20°C) to 212°F (100°C)
IP Rating	IP68 (70 PSI, 5 BAR)

Quick Specs