





- For clamping cable or tubing securely into place.
- Resist corrosion, salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL certification or testing.)
- All parts are size marked in inches and millimeters.
- Standard material Nylon 6/6. 94V-0 available, consult Heyco.
- For Snap Rivets compatible with Heyco Cable Clamps, see the table on page 31.

## Heyco® Nylon Cable Clamps

MOUNTING HOLE DIAMETER		SCREW SIZE	PART DIMENSION A		PART NO.		DESCRIPTION			
in.	mm.		in.	mm.	Black	Natural				
<b>Light Duty - 3/8" (9,5 mm) wide, .05" (1,3 mm) thick</b>										
.170	4,3	8	.125	3,2	<b>3362</b>	<b>3312</b>	CCL 125-170			
			.187	4,7	<b>3363</b>	<b>3313</b>	CCL 187-170			
			.250	6,3	<b>3364</b>	<b>3314</b>	CCL 250-170			
			.312	7,9	<b>3365</b>	<b>3315</b>	CCL 312-170			
			.375	9,5	<b>3366</b>	<b>3316</b>	CCL 375-170			
			.437	11,1	<b>3367</b>	<b>3317</b>	CCL 437-170			
.203	5,2	10	.500	12,7	<b>3368</b>	<b>3318</b>	CCL 500-170			
			<b>Heavy Duty - 1/2" (12,7 mm) wide, .06" (1,5 mm) thick</b>							
			.203	5,2	10	.125	3,2	<b>3372</b>	<b>3322</b>	CCH 1/8
						.187	4,7	<b>3373</b>	<b>3323</b>	CCH 3/16
						.250	6,3	<b>3374</b>	<b>3324</b>	CCH 1/4
						.312	7,9	<b>3375</b>	<b>3325</b>	CCH 5/16
.375	9,5	<b>3376</b>				<b>3326</b>	CCH 3/8			
.437	11,1	<b>3377</b>				<b>3327</b>	CCH 7/16			
.500	12,7	<b>3378</b>				<b>3328</b>	CCH 1/2			
.562	14,3	<b>3379</b>				<b>3329</b>	CCH 9/16			
.625	15,9	<b>3380</b>				<b>3330</b>	CCH 5/8			
.687	17,4	<b>3381</b>				<b>3331</b>	CCH 11/16			
.750	19,1	<b>3382</b>				<b>3332</b>	CCH 3/4			
.812	20,6	<b>3383</b>				<b>3333</b>	CCH 13/16			
.875	22,2	<b>3384</b>				<b>3334</b>	CCH 7/8			
1.000	25,4	<b>3390</b>				<b>3340</b>	CCH 1			
1.125	28,6	<b>3392</b>				<b>3342</b>	CCH 1-1/8			
1.187	30,1	<b>3393</b>				<b>3343</b>	CCH 1-3/16			
1.250	31,8	<b>3394</b>				<b>3344</b>	CCH 1-1/4			
1.375	34,9	<b>3396</b>				<b>3346</b>	CCH 1-3/8			
1.500	38,1	<b>3398</b>				<b>3348</b>	CCH 1-1/2			

Standard colors black and natural.

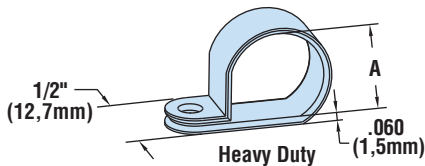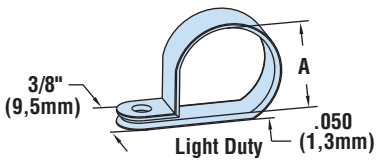

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E54523
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 221°F (105°C) - Black 32°F (0°C) to 185°F (85°C) - Natural




# Heyco® Lockit™ Nylon Cable Clamps

Lock onto Wire and Cable for Faster Final Assembly

Heavy Duty - 1/2" (12,7 mm) Wide, .06" (1,5 mm) Thick

MOUNTING HOLE DIAMETER		SCREW SIZE	PART DIMENSION A		PART NO.		DESCRIPTION
in.	mm.		in.	mm.	Black	Natural	
<b>Push Lock Style</b> For Panels up to .125" (3,2 mm) thick							
.187	4,7	Push Mount	1.13	28,6	3730	3731	PLCC 1125
			1.19	30,1	3734	3735	PLCC 1187
			1.25	31,8	3738	3739	PLCC 1250
			1.38	34,9	3742	3743	PLCC 1375
			1.50	38,1	3746	3747	PLCC 1500
<b>Snap Lock Style</b>							
.190	4,8	#10	1.13	28,6	3728	3729	SLCC 1125
			1.19	30,1	3732	3733	SLCC 1187
			1.25	31,8	3736	3737	SLCC 1250
			1.38	34,9	3740	3741	SLCC 1375
			1.50	38,1	3744	3745	SLCC 1500

Standard colors black and natural.

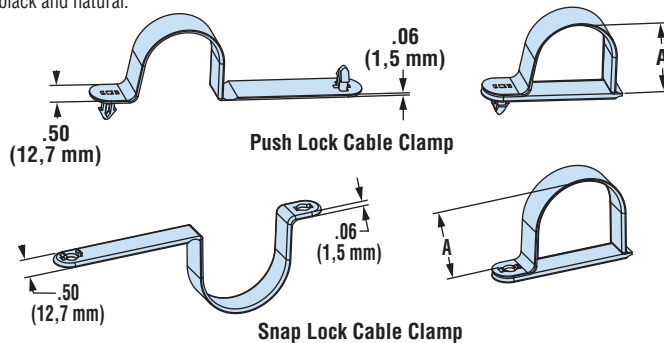

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 221°F (105°C) - Black 32°F (0°C) to 185°F (85°C) - Natural

## Snap Rivet Table - for use with Heyco® Nylon Cable Clamps

For our complete line of Snap Rivets, see pages 7-62 & 7-63

PANEL THICKNESS				PART NO.			DESCRIPTION
Minimum		Maximum		Black	White	V-0 Black	
in.	mm.	in.	mm.				
For .170" (4,3 mm) Mounting Hole, Light Duty Cable Clamps							
.08	2,0	.12	3,0	9062	9063	9062F	PR 161-177
.12	3,0	.16	4,1	9064	9065	9064F	PR 161-217
.16	4,1	.20	5,1	9066	9067	9066F	PR 161-256
.20	5,1	.24	6,1	9068	9069	9068F	PR 161-295
.25	6,4	.31	7,9	9318	9319	9318F	PR 161-354
.39	9,9	.45	11,4	9320	9321	9320F	PR 161-492
For .203" (5,2 mm) Mounting Hole, Light or Heavy Duty Cable Clamps							
.06	1,5	.10	2,5	9076	9077	9076F	PR 201-177
.10	2,5	.14	3,6	9078	9079	9078F	PR 201-217
.14	3,6	.18	4,6	9080	9081	9080F	PR 201-256
.18	4,6	.22	5,6	9082	9083	9082F	PR 201-295



### Push Lock Style

- Push-in “arrowhead” locks part onto cable quickly and easily, for faster final assembly requiring **no additional hardware**.
- Resist corrosion, salt water, weak acids, grease, and common solvents.

### Snap Lock Style

- Locking feature allows for preassembly onto cable quickly and easily, for faster final assembly.
- Lock securely but can be **removed and reused**.
- Resist corrosion, salt water, weak acids, grease, and common solvents.
- Standard Material Nylon 6/6. 94V-0 available. Consult Heyco.

Quick Specs






- Ideal for securing, insulating, and routing cable and tubing.
- Cable and wire can be installed or removed for repair without removing clamp.
- Mounts with screws, mounting buttons or rivets.

## Heyco® Nylon Wire Harness Clamps

MOUNTING HOLE DIAMETER		SCREW SIZE	PART DIMENSIONS						PART NO.	DESCRIPTION	STYLE
in.	mm.		A Bundle Dia.		B Overall Length		C Width				
			<b>Snap Mouth *</b>								
.157	4,0	#8	.71	18,0	1.38	35,1	.50	12,7	<b>4148</b>	WHCX 750	1
			<b>Open Mouth</b>								
.157	4,0	#8	.13	3,2	.77	19,5	.34	8,5	<b>4149</b>	WHC 125	2
.205	5,2	#10	.25	6,4	.86	21,8	.41	10,4	<b>4150</b>	WHC 250	3
			.38	9,0	.83	21,0	.40	10,2	<b>4151</b>	WHC 375	
			.50	12,5	1.16	29,4	.40	10,2	<b>4152</b>	WHC 500	
			.63	15,9	1.13	28,6	.50	12,7	<b>4153</b>	WHC 625	
			.75	19,1	1.28	32,5	.50	12,7	<b>4154</b>	WHC 750	
			1.00	25,4	1.53	38,9	.50	12,7	<b>4210</b>	WHC 1000	
			1.50	38,1	2.12	53,9	.50	12,7	<b>4211</b>	WHC 1500	

Standard color natural.

\*Bundle Diameter in closed position.

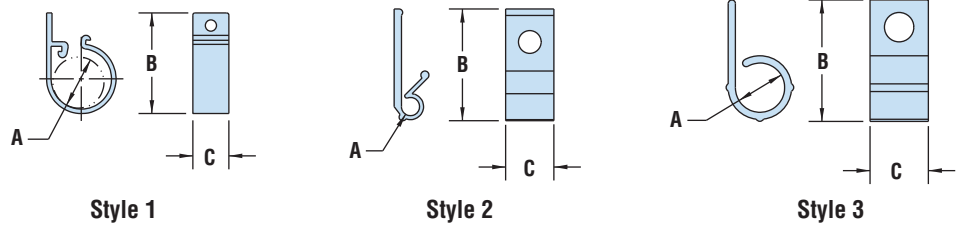


- Retainer clip allows clamp to be pre-positioned on hose before final installation.
- Double row of teeth for more secure grip.
- Quick and easy installation. Tighten instantly with hand pliers or Air Tool (on page 33).
- Reusable. Can be removed without cutting.
- Supertough nylon clamps offer additional clamping strength.
- Outlast tubing under pressure.
- Non-conductive and non-magnetic.
- No moving pieces to seize or vibrate loose.
- Maximum Pressure Rating: 200 PSI.

## Heyco® Nylon Lockit™ Hose Clamps

EFFECTIVE CLAMP RANGE				PART NO.	DESCRIPTION	PART DIMENSIONS			
Minimum Diameter		Maximum Diameter				A Clamp Thickness		B Strap Thickness	
in.	mm.	in.	mm.	Black					
<b>LHC Series</b>									
.34	8,7	.41	10,3	<b>2388</b>	LHC 344	.25	6,4	.08	2,0
.53	13,5	.59	15,1	<b>2391</b>	LHC 531				
.67	17,0	.81	20,6	<b>2393</b>	LHC 672				

Standard color black.

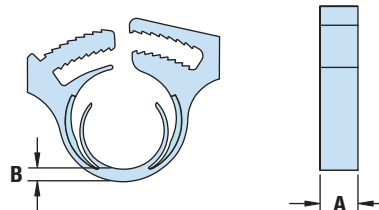

Quick Specs

	WHCX & WHC	LHC
Material	Nylon 6/6	Nylon 6/6 Supertough
Flammability Rating	94V-2	94HB
Temperature Range	32°F (0°C) to 185°F (85°C)	32°F (0°C) to 185°F (85°C)



## Heyco® Nylon Hose Clamps

EFFECTIVE CLAMP RANGE				PART NO.			DESCRIPTION	PART DIMENSIONS				
Minimum Diameter		Maximum Diameter		6/6 NYLON		GF* NYLON		A		B		
in.	mm.	in.	mm.	Black	White	Black	in.	mm.	in.	mm.		
<b>Regular Style</b>												
.25	6,4	.31	7,9	—	—	2302	HC 250	.13	3,2	.04	1,0	
.34	8,7	.41	10,3	2306	2307	2308	HC 344	.21	5,3	.07	1,8	
.41	10,3	.47	11,9	2310	2311	2312	HC 406					
.47	11,9	.53	13,5	2314	2315	2316	HC 468					
.53	13,5	.59	15,1	2318	2319	2320	HC 531					
.59	15,1	.66	16,7	2322	2323	2324	HC 593					
.67	17,1	.81	20,6	2326	2327	2328	HC 672					
.75	19,1	.88	22,2	2330	2331	2332	HC 750					
.88	22,2	1.00	25,4	2334	2335	2336	HC 875					
.95	24,1	1.09	26,2	2338	2339	2340	HC 953					
1.03	26,2	1.19	30,2	2342	2343	2344	HC 1031					
1.25	31,8	1.44	36,5	2346	2347	2348	HC 1250					
1.41	35,7	1.63	41,3	2350	2351	2352	HC 1406	.36	9,1			
1.59	40,4	1.81	46,0	2354	2355	2356	HC 1593					
1.69	42,9	1.91	48,4	2358	2359	2360	HC 1687					
1.88	47,6	2.13	54,0	2362	2363	2364	HC 1875	.40	10,2			
2.13	54,0	2.38	60,3	2366	2367	2368	HC 2.125					
<b>Strap Mate Style</b>												
1.94	49,2	2.28	57,9	-	-	2374	HC 1930	.44	11,2	.08	2,0	
2.25	57,1	2.88	73,0	-	-	2377	HC 2.25					
2.75	69,8	3.63	92,1	-	-	2380	HC 2.75					
3.50	88,9	4.25	108,0	-	-	2383	HC 3.5					
4.00	101,6	5.00	127,0	-	-	2386	HC 4.0					

Standard colors 6/6 nylon black and white. Glass filled nylon standard color is black.


\* HC 250 features a single tang design in glass-filled nylon only.

## Heyco® Pneumatic Air Tool for Nylon Hose Clamps

For Lockit and Regular Style Hose Clamps only

AIR TOOL PART NO. INCLUDING JAWS	JAW PART NO.*	
	Upper	Lower
0170	0T83	0T84


\*Jaw Part No. if purchased separately.

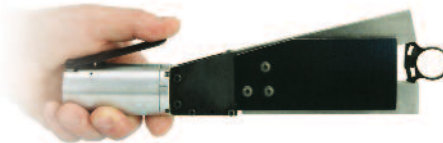


Materials	Nylon 6/6 or glass-filled Nylon
Flammability Rating	94V-2 for 6/6 Nylon, 94HB for glass-filled Nylon
Temperature Range	32°F (0°C) to 221°F(105°C)



- **Quick and easy installation.** Tighten instantly with hand pliers or Air Tools.
- **Reusable.** Can be removed without cutting.
- Glass-filled nylon clamps offer additional clamping strength.
- Outlast tubing under pressure.
- Lightweight yet resist corrosion, salt water, weak acids, grease, and common solvents.



Regular Style



Strap Mate Style

- Allows for a **semi-automated process** which increases speed over manual tools.
- Activated by hand lever reducing stress on the hand and the risk of carpal tunnel syndrome associated with repetitive assembly.
- Maximum Pressure Rating: 125 psi
- Adjustable jaws allow tool to accommodate a wide range of Heyco Hose Clamps.
- Operates only when lever is depressed.
- Tool operates on standard shop air.

Quick  
Specs





## Heyco® Self-Aligning Nylon Cable Clamps

- Interlocking surfaces prevent the cable clamp from separating when installing the mounting screw.
- Easily guide and locate wires and cables.
- Designed with rounded edges to prevent chaffing and cutting wire insulation.

MOUNTING HOLE DIAMETER		SCREW SIZE	PART DIMENSION A		PART NO.		DESCRIPTION
in.	mm.		in.	mm.	Black	Natural	
<b>.390" (9,9 mm) Wide, .04" (1,0 mm) Thick</b>							
.187	4,7	10	.125	3,2	<b>13050B</b>	<b>13050</b>	CCSA 1/8
			.187	4,7	<b>13051B</b>	<b>13051</b>	CCSA 3/16
			.250	6,3	<b>13052B</b>	<b>13052</b>	CCSA 1/4
			.312	7,9	<b>13053B</b>	<b>13053</b>	CCSA 5/16
			.375	9,5	<b>13054B</b>	<b>13054</b>	CCSA 3/8
			.500	12,7	<b>13056B</b>	<b>13056</b>	CCSA 1/2*
<b>.500" (12,7 mm) Wide, .06" (1,5 mm) Thick</b>							
.187	4,7	10	.625	15,9	<b>13058B</b>	<b>13058</b>	CCSA 5/8
			.750	19,1	<b>13060B</b>	<b>13060</b>	CCSA 3/4
			1.000	25,4	<b>13062B</b>	<b>13062</b>	CCSA 1

Standard colors black and natural.

\*.06" (1,5 mm) Thick



CCSA Series

Quick Specs

Material Nylon 6/6  
 Flammability Rating 94V-2  
 Temperature Range 32°F (0°C) to 185°F (85°C)