




Heyco® Hose and Cable Wrap-Nylon



BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.125	3,2	1.500	38,1	8936	8937	CW 187 N*	.187	4,8	.250	6,3	.020	0,5
.187	4,8	2.000	50,8	8940	8941	CW 250 N	.250	6,3	.375	9,5	.025	0,6
.312	7,9	3.000	76,2	8944	8945	CW 375 N	.375	9,5	.438	11,1	.035	0,9
.375	9,5	4.000	101,6	8948	8949	CW 500 N	.500	12,7	.500	12,7	.035	0,9
.500	12,7	4.500	114,3	8952	8953	CW 625 N*	.625	15,9	.625	15,9	.032	0,8
		5.000	127,0	8956	8957	CW 750 N	.750	19,0	.750	19,1	.032	0,8
1.000	25,4	7.000	177,8	8960	8961	CW 1000 N	1.000	25,4	1.000	25,4	.032	0,8

Standard colors UV black or natural.
* Parts are not UR recognized.

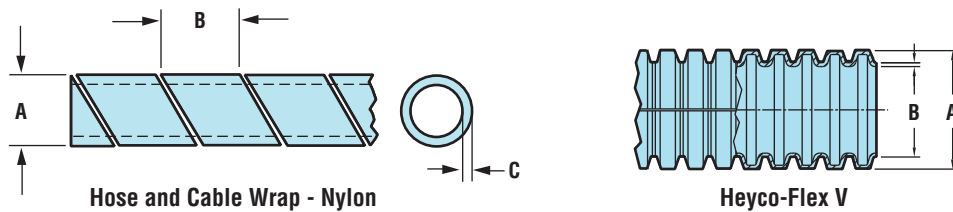

- **Easy to use: Just twist on wire!**
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .125” (3,2 mm) to 7” (177,8 mm) diameters.
- Available in UV black or natural nylon color.
- For hose and cable **clamps**, see pages 7-1 through 7-4.

Heyco-Flex™ V Nylon Slit Tubing

NOMINAL DIAMETER	PART NO.	DESCRIPTION	PART DIMENSIONS						ROLL LENGTH
			A Outside Diameter		B Inside Diameter		Wall Thickness Range		
in.	Black		in.	mm.	in.	mm.	in.	mm.	ft.
1/8	1634A	HF5 1/8	.260	6,6	.168	4,3	.007-.019	0,18-0,48	100
1/4	1635A	HF5 1/4	.390	9,9	.288	7,3			
11/32	1636A	HF5 11/32	.511	13,0	.345	8,8			
3/8	1637A	HF5 3/8	.532	13,5	.415	10,5	.007-.019	0,18-0,48	100
7/16	1638A	HF5 7/16	.625	15,9	.442	11,2			
1/2	1639A	HF5 1/2	.635	16,2	.525	13,3			
5/8	1641A	HF5 5/8	.806	20,5	.663	16,8			
3/4	1642A	HF5 3/4	.928	23,6	.790	20,1			
1	1643A	HF5 1	1.122	28,5	.917	23,3	.007-.019	0,18-0,48	100
1-1/16	1644A	HF5 1-1/16	1.215	30,9	1.010	25,6			
1-1/4	1646A	HF5 1-1/4	1.492	37,9	1.283	32,6			
1-1/2	1649A	HF5 1-1/2	1.734	43,9	1.465	37,2			

Standard color black.



- **Slit design allows side entry** and encirclement of preassembled harnesses and capillary tubes.
- Unique slit design allows for wire breakouts.
- Heyco-Flex V is lightweight and flexible, yet durable enough to meet your wire management requirements.
- Multiple sizes 1/8” to 1-1/2”.
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- Quick installation; cuts with utility knife, PVC cutter or Heyco cutting tool #8340. See page 2-2.

Material	Hose and Cable Wrap Nylon	Material	Heyco-Flex V Polyamide 6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E173954	Temperature Range of Use	-40°C to 115°C (-40°F to 239°F) Continuous -40°C to 190°C (-40°F to 374°F) Intermittent
Conforms to:	ASTM D 4066, Group 2; Fed Spec LP410	Flammability Rating	94HB
Temperature Range	-40°F (-40°C) to 250°F (121°C) UL rated temp not to exceed 149°F (65°C)		

Quick Specs