



# Heyco® Hose and Cable Wrap- Polyethylene

## Standard

- **Easy to use: Just twist on wire!**
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .125” (3,2 mm) to 7” (177,8 mm) diameters.
- Available in UV black or natural color.
- For hose and cable **clamps**, see pages 7-1 through 7-4.

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.125	3,2	1.500	38,1	<b>8904</b>	<b>8905</b>	CW 187 PE*	.187	4,8	.250	6,3	.031	0,8
.187	4,8	2.000	50,8	<b>8908</b>	<b>8909</b>	CW 250 PE	.250	6,3	.375	9,5	.045	1,1
.312	7,9	3.000	76,2	<b>8912</b>	<b>8913</b>	CW 375 PE	.375	9,5	.438	11,1	.052	1,3
.375	9,5	4.000	101,6	<b>8916</b>	<b>8917</b>	CW 500 PE	.500	12,7	.500	12,7	.062	1,6
.500	12,7	4.500	114,3	<b>8920</b>	<b>8921</b>	CW 625 PE*	.625	15,9	.625	15,9	.062	1,6
		5.000	127,0	<b>8924</b>	<b>8925</b>	CW 750 PE	.750	19,1	.750	19,1	.065	1,7
1.000	25,4	7.000	177,8	<b>8928</b>	<b>8929</b>	CW 1000 PE	1.000	25,4	1.000	25,4	.080	2,0

Standard colors UV black or natural.  
\* Parts are not UR recognized.




## Heavy Duty

- Designed to shield hydraulic, pneumatic, and high pressure hoses; cables and cable bundles.
- Available in a **variety of sizes** that fit cable, cable bundles and hoses from 3/4” to 6” in diameter.
- **Smooth finish interior wall.**
- May be **color coded** (see tabular chart).
- Packaged as one continuous piece, not spooled.
- May be **cut to desired length**, please consult Heyco.

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS						
Minimum Diameter		Maximum Diameter		Black	Color Coded		A Outside Dia.		B Pitch		C Thickness		
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	
.750	19,1	1.500	38,1	<b>8964</b>	<b>8965</b>	Red	CWG 99 PE	.93	23,6	.95	24,1	.12	3,0
1.000	25,4	2.000	50,8	<b>8966</b>	<b>8967</b>	Blue	CWG 126 PE	1.12	28,4	1.25	31,8	.13	3,3
1.250	31,8	2.500	63,5	<b>8968</b>	<b>8969</b>	Green	CWG 153 PE	1.37	34,8	1.35	34,3	.14	3,5
1.500	38,1	3.000	76,2	<b>8970</b>	<b>8971</b>	Yellow	CWG 181 PE	1.62	41,1	1.50	38,1	.15	3,9
2.000	50,8	3.500	88,9	<b>8972</b>	<b>8973</b>	Orange	CWG 234 PE	2.09	53,1	1.60	40,6	.17	4,3
3.500	88,9	6.000	152,4	<b>8974</b>	<b>8975</b>	Gray	CWG 401 PE	3.50	88,9	1.95	49,5	.25	6,4

\*Standard color black or color coded

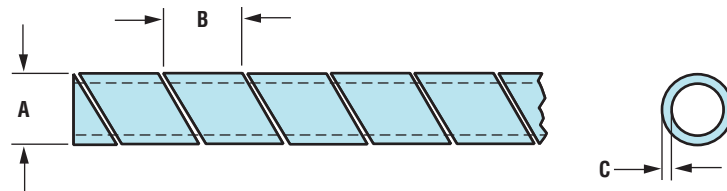

Quick Specs

<b>Material</b>	Polyethylene (Standard), High Density Polyethylene (Heavy Duty)
<b>Certifications</b>	Standard Cable Wrap Only: <b>UL</b> Recognized under the Component Program of Underwriters' Laboratories File E173954 Fed Spec LP390, Mil I-631D, Mil P-21922B
<b>Conforms to:</b>	
<b>Temperature Range</b>	-76°F (-60°C) to 190°F (88°C) UL rated temp not to exceed 122°F (50°C) (Standard) 18°F (0°C) to 74°F (165°C) (Heavy Duty)