





# Heyco® Original Series-35 Liquid Tight Cordgrips

Pigtail, PG Hubs, in HEYConvenient Small Packs


CABLE DIA. RANGE				PART NO.		DESCRIPTION	SMALL PACK UL or RA	PART DIMENSIONS										
Minimum		Maximum		Black	Gray			A Clearance Hole Dia.	B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Flat Size			
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.			
.064	1,6	.210	5,3	4110	4111	FLEX RLTF 7	RA	100	.492	12,5	2,44	62,0	.33	8,4	.20	5,1	.59	15,0
.114	2,9	.250	6,4	4112	4113	FLEX LTF 7												
.069	1,8	.187	4,7	4114	4115	FLEX RLTF 9	RA	50	.599	15,2	2,77	70,4	.34	8,6	.20	5,1	.75	19,1
.181	4,6	.312	7,9	4116	4117	FLEX LTF 9												
.069	1,8	.250	6,6	4118	4119	FLEX RLTF 11	RA	50	.733	18,6	3,44	87,4	.39	9,9	.20	5,1	.86	21,8
.230	5,8	.395	10,0	4120	4121	FLEX LTF 11												
.170	4,3	.450	11,4	4124	4125	FLEX LTF 13.5	UL	50	.804	20,4	3,88	98,6	.41	10,4	.20	5,1	.95	24,1
.230	5,8	.546	13,9	4128	4129	FLEX LTF 16	UL	50	.886	22,5	4,36	110,7	.45	11,4	.23	5,8	1,05	26,7
.250	6,4	.485	12,3	4130	4131	FLEX RLTF 21	UL	25	1,115	28,3	5,03	127,8	.52	13,2	.23	5,8	1,30	33,0
.450	11,4	.709	18,0	4132	4133	FLEX LTF 21												

Standard colors black and gray.

- Flexible Pigtail™ extender prevents sharp bends and extends cable life.
- IP 68 rated.
- Widest range of approved cable diameters.
- For use in clearance or threaded holes.
- Acme threads on body prevent skipping and speed installation.
- PG hub threads are steel conduit threads per DIN 40430, see page 3-49.
- All nylon construction with TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .064" (1,6 mm) to .709" (18,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-43.
- Consult Heyco for cordgrips molded in other colors.

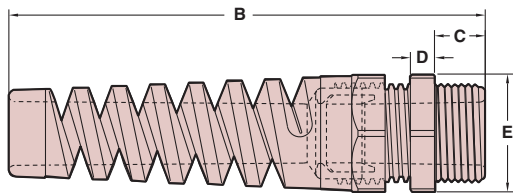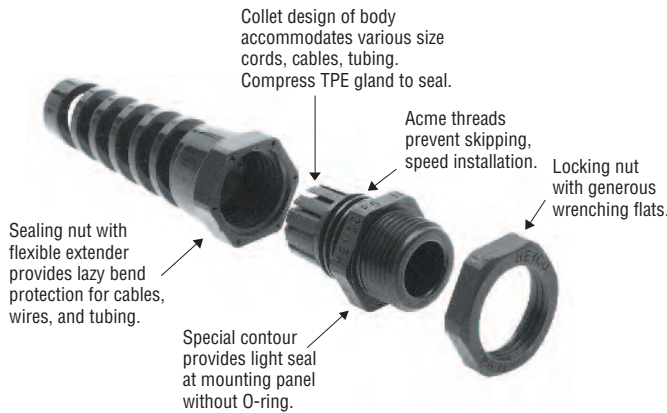

SEALING NUT WITH FLEX-PROTECTOR EXTENDER



SUGGESTED CLEARANCE HOLE FOR NONTHREADED MOUNTING

<b>Material</b>	Nylon 6/6 w/TPE Sealing Gland
<b>Certifications</b>	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>RA Recognized under the Component Program of Underwriters' Laboratories File E51579</li> <li>SF Certified by Canadian Standards Association File 93876C</li> </ul>
<b>Flammability Rating</b>	94V-2
<b>Temperature Rating</b>	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
<b>IP Rating</b>	IP 68 (70 PSI, 5 BAR)

*Quick Specs*