

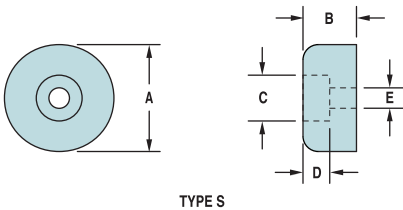


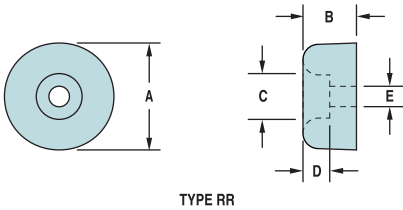

Heyco® Rubber Pocket Bumpers

- Bumpers can be used as mounting feet to prevent equipment from sliding or moving.
- Designed for through hole installation.
- 60-70 Durometer Range.
- 29 sizes available that will accommodate various mounting holes and panel thicknesses.
- Pocket Bumpers are constructed of SBR with an operating temperature range of -40°F (-40°C) to 221°F (105°C).
- Provide vibration dampening.

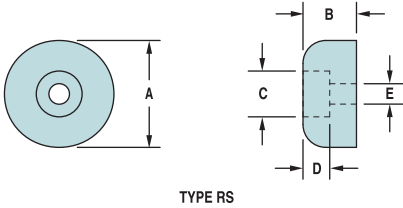

A Outside Diameter		PART DIMENSIONS				D Recess Depth		BLACK PART NO.		E Fastner Hole Dia.*	
		B Overall Height		C Recess Diameter				No Washer	With Steel Washer		
in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.
Type RS											
.500	12,7	.250	6,4	.250	6,4	.156	4,0	-	G2201	.125	3,2
.625	15,9	.375	9,5	.250	6,4	.187	4,7	-	G2205	.125	3,2
.750	19,1	.375	9,5	.312	7,9	.187	4,7	-	G2209	.156	4,0
.812	20,6	.719	18,3	.375	9,5	.281	7,1	-	G2213	.218	5,5
1.000	25,4	.812	20,6	.250	6,4	.437	11,1	-	G2217	.125	3,2
		1.000	25,4	.312	7,9	.625	15,9	G2220	G2221	.156	4,0
1.093	27,7	.625	15,9	.437	11,1	.406	10,3	-	G2225	.187	4,7
Type RR											
.500	12,7	.250	6,4	.250	6,4	.156	4,0	-	G2229	.093	2,4
.750	19,1	.562	14,3	.375	9,5	.250	6,4	-	G2233	.187	4,7
		.750	19,1	.312	7,9	.250	6,4	-	G2237	.125	3,2
.812	20,6	.812	20,6	.468	11,9	.437	11,1	-	G2241	.250	6,4
.937	23,8	.350	8,9	.375	9,5	.180	4,6	-	G2245	.187	4,7
		.375	9,5	.375	9,5	.218	5,5	G2244	-		
.969	24,6	.343	8,7	.375	9,5	.187	4,7	-	G2249	.187	4,7
1.000	25,4	.437	11,1	.375	9,5	.187	4,7	-	G2253	.187	4,7
		.500	12,7	.500	12,7	.250	6,4	-	G2257	.218	5,5
		.562	14,3	.531	13,5	.312	7,9	-	G2261	.281	7,1
1.250	31,8	1.250	31,8	.375	9,5	.750	19,1	-	G2267	.250	6,4
		1.875	47,6	.375	9,5	.750	19,1	-	G2271		
1.500	38,1	.625	15,9	.500	12,7	.343	8,7	-	G2275	.187	4,7
		.750	19,1	.750	19,1	.343	8,7	G2278	G2279	.312	7,9
1.700	43,2	.750	19,1	.468	11,9	.500	12,7	-	G2283	.250	6,4
		1.120	28,4	.600	15,2	.720	18,3	G2286	-	.380	9,7
1.750	44,5	1.750	44,5	.625	15,9	.500	12,7	G2290	-	.375	9,5
2.500	63,5	1.000	25,4	1.125	28,6	.500	12,7	G2294	-	.375	9,5
				G2296†	-						
				G2298†	-						
		2.000	50,8	1.125	28,6	1.125	28,6	G2302	-		
Type S											
1.000	25,4	.500	12,7	.355 / .430	9,0 / 10,9	.195 / .160	5,0 / 4,1	-	G2307	.187	4,7
1.500	38,1	.750	19,1	.750	19,1	.375	9,5	-	G2311	.250	6,4

Standard color black. Standard material SBR (Styrene Butadiene Rubber), 60-70 durometer.

*Fastener not included.

†Part No. G2296 and G2298 is made from White SBR, 60-70 durometer.

Quick Specs

Material
Temperature Rating

SBR
-40°F (-40°C) to 221°F (105°C)