




Heyco® Extra Dome Plugs

Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)

| MOUNTING HOLE DIAMETER | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | | | |
|------------------------|-------|----------|-------|-------------|-----------------|-------|------------------|------|-----------------|------|
| in. | mm. | Black | White | | A Head Diameter | | B Overall Height | | C Inside Height | |
| 3.0 | 76,2 | 2442 | 2443 | EDP 3.0 | 3.22 | 81,8 | 1.37 | 34,8 | 1.26 | 32,0 |
| 5.0 | 127,0 | 2444 | 2445 | EDP 5.0 | 5.22 | 132,6 | 1.41 | 35,8 | 1.31 | 33,3 |

Standard colors black. Consult Heyco for other colors.

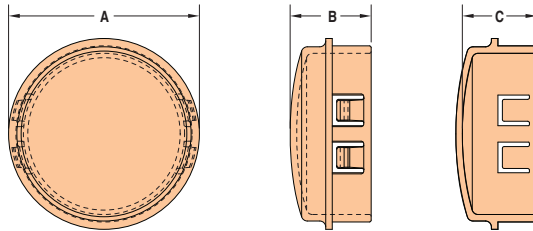


- **Extra dome height** for additional clearance under the top.
- Consult Heyco for additional sizes.
- Lock firmly into panels up to .250" (6,4 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Not UL Recognized.

Heyco® Snap-In Metric Dome Plugs

Multiple Locking Steps for Panel Thickness up to 2,5 mm (.098")
Mounting Hole Diameter Range: 16,0 mm (.630") to 32,0 mm (1.260")

| MOUNTING HOLE DIAMETER | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | |
|------------------------|-------|----------|-------|-------------|-----------------|-------|------------------|------|
| mm. | in. | Black | White | | A Head Diameter | | B Overall Height | |
| 16,0 | .630 | 2128 | 2130 | MDP 16 | 18,5 | .728 | 10,3 | .406 |
| 20,0 | .787 | 2131 | 2132 | MDP 20 | 22,6 | .890 | | |
| 25,0 | .984 | 2133 | 2134 | MDP 25 | 29,8 | 1.173 | 11,5 | .453 |
| 32,0 | 1.260 | 2135 | 2136 | MDP 32 | 35,3 | 1.388 | | |

Standard color black. Consult Heyco for other colors.



- Multiple sizes for use in **16,0 mm (.630") to 32,0 mm (1.260") diameter holes**. For other metric sizes, consult Heyco.
- Close unneeded panel holes.
- Quick and easy installation.
- Convex, matte finish head tapers to a thin edge.
- Lock firmly into panel up to 4,1 mm (.162") thick.
- Approximate Head Thickness: 1,6 mm (.062").
- For **Threaded Metric Plugs**, see page 6-26.
- For our complete range of Dome Plugs, see page 6-1.

Material Certifications

Nylon 6/6
Recognized under the Component Program of Underwriters' Laboratories, File E51579 (MDP's only)
 Certified by Canadian Standards Association, File 8919 (MDP's only)

Flammability Rating
Temperature Rating

94V-2
-40°F (-40°C) to 221°F (105°C)

Quick Specs