




Heyco® Armor Bushings

- Use with Flexible Armored Cable (BX) and Flexible Metallic Conduit (FMC), to insulate rough cut conduit ends.
- Chamfered lead-in allows for fast installation.
- Suitable for installation at temperatures up to 194°F (90°C) and as low as -40°F (-40°C).
- Size-marked for easy identification.
- Molded of high dielectric polyethylene.

WILL FIT THESE ARMORED CABLES (AWG/CONDUCTORS)	PART NO.	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Head Diameter		C Overall Height	
			in.	mm.	in.	mm.	in.	mm.
14/2, 14/3, 12/2, 12/3 14/4, 6/1, 4/1	2264	AB 0	.37	9,4	.68	17,3	.58	14,7
	2265	AB 1	.44	11,2	.70	17,8	.63	16,0
12/4, 10/2, 10/3, 2/1	2266	AB 2	.57	14,5	.85	21,6	.60	15,2
	2281	AB Orange*	.58	14,7	.90	22,9	.68	17,3
10/4, 8/2, 8/3, 1/1	2267	AB 3	.73	18,5	1.02	25,9	.70	17,8

Standard color red except as noted.
*This part is not UL or CSA certified.

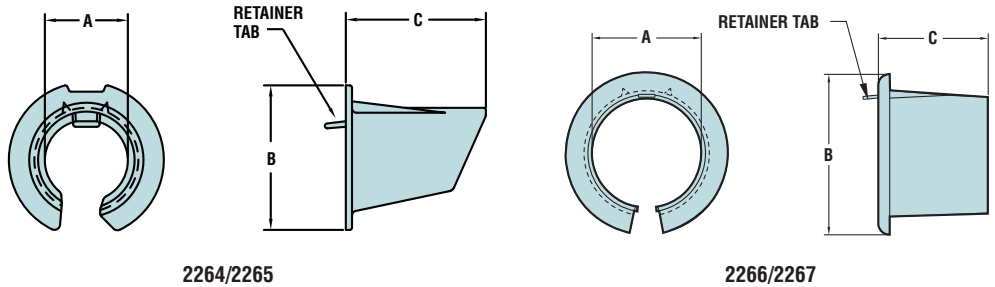

2264/2265

2266/2267




Heyco® Threaded Insulating Bushing

- Converts raw-edged pipe ends with NPT threads to smooth insulated ends.
- Insulates and mechanically protects lamp cords, other electrical and communications cables, tubing, hose, rope, and utility lines.
- Molded of type Nylon 6/6.
- Quick Specs below do not apply.

TRADE SIZE NPT	PART NO.	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Head Diameter		C Overall Height	
			in.	mm.	in.	mm.	in.	mm.
1/8	2282	IB 1/8	.268	6,8	.53	13,4	.30	7,6

Available in black color only.



Quick Specs

Material
Certifications

Temperature Rating

High Dielectric Polyethylene
 (UL) Listed under Underwriters' Laboratories File E51579
 (CSA) Certified by the Canadian Standards Association File 213253
 -40°F (-40°C) to 194°F (90°C)