



**NO O-RING  
REQUIRED!**



# Heyco®-Tite Liquid Tight Cordgrips



**Pigtail™, Metric Hubs** with Integral Sealing Ring

*The Ultimate in Liquid Tight Strain Relief Protection*

- Flexible Pigtail extender prevents sharp bends and extends cable life.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to .705" (17,9 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-43.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.		DESCRIPTION	UL or RA	PART DIMENSIONS										
Minimum		Maximum		Black	Gray			A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Nut Flat Size		
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		
.065	1,7	.210	5,3	<b>M4396</b>	<b>M4397</b>	Flex RLTCG M12		.473	12,0	2,44	62,0	.32	8,1	.21	5,3	.63	16,0	
.115	2,9	.250	6,4	<b>M4398</b>	<b>M4399</b>	Flex LTCG M12	RA											
.065	1,7	.230	5,8	<b>M4400</b>	<b>M4401</b>	Flex RLTCG M16	RA	.630	16,0	2,77	70,4	.32	8,1	.21	5,3	.83	21,1	
.105	2,7	.315	8,0	<b>M4402</b>	<b>M4403</b>	Flex LTCG M16												
.095	2,4	.290	7,4	<b>M4404</b>	<b>M4405</b>	Flex RLTCG M20	UL	.787	20,0	3,89	98,8	.41	10,4	.21	5,3	.98	24,9	
.170	4,3	.450	11,4	<b>M4406</b>	<b>M4407</b>	Flex LTCG M20												
<b>NEW!</b>	.260	6,6	.545	13,8	<b>M3270</b>	<b>M3271</b>	Flex LTCG LL M20	UL	.787	20,0	4,34	110,2	.41	10,4	.21	5,3	1,06	26,9
	.250	6,4	.490	12,4	<b>M4408</b>	<b>M4409</b>	Flex RLTCG M25	UL										
	.435	11,1	.705	17,9	<b>M4410</b>	<b>M4411</b>	Flex LTCG M25	UL	.985	25,0	5,04	128,0	.52	13,2	.25	6,4	1,30	33,0

Standard colors black and gray.

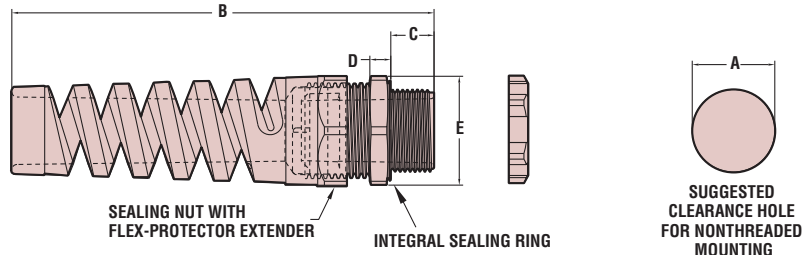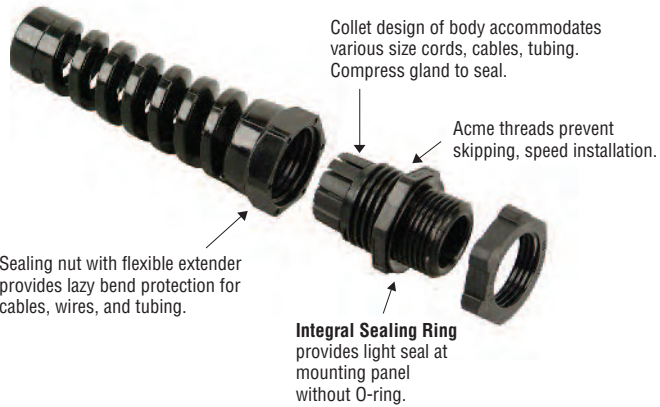

<b>Material</b>	Nylon 6/6 w/Buna N or TPE Sealing Gland
<b>Certifications</b>	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>RA Recognized under Components Program of Underwriters' Laboratories File E51579</li> <li>SF Certified by Canadian Standards Association File 93876C</li> <li>Approved for NEMA 6 and 6P Applications</li> <li>VDE Marks License 136681</li> <li>CE Per CE Low Voltage Directive 73/23/EEC</li> </ul>
<b>Flammability Rating</b>	94V-2
<b>Temperature Rating</b>	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
<b>IP Rating</b>	IP 68 (70 PSI, 5 BAR)

*Quick Specs*