



**NO O-RING
REQUIRED!**

Heyco® -Tite Liquid Tight Cordgrips


Pigtail™, PG Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection



CABLE DIA. RANGE				PART NO.		DESCRIPTION	UL or RA	PART DIMENSIONS									
Minimum		Maximum		Black	Gray			A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Nut Flat Size	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.065	1,7	.210	5,3	M3464	M3465	Flex RLTCG 7		.492	12,5	2,44	62,0	.32	8,1	.21	5,3	.63	16,0
.115	2,9	.250	6,4	M3237	M3238	Flex LTCG 7	RA										
.065	1,7	.230	5,8	M3466	M3467	Flex RLTCG 9		.599	15,2	2,77	70,4	.32	8,1	.21	5,3	.83	21,0
.105	2,7	.315	8,0	M3240	M3241	Flex LTCG 9	RA										
.069	1,8	.250	6,6	M3468	M3469	Flex RLTCG 11		.733	18,6	3,46	87,9	.38	9,7	.21	5,3	.94	23,9
.230	5,8	.400	10,2	M3243	M3244	Flex LTCG 11	RA										
.095	2,4	.290	7,4	M4526	M4527	Flex RLTCG 13.5	UL	.804	20,4	3,89	98,8	.41	10,4	.21	5,3	.98	24,9
.170	4,3	.450	11,4	M3246	M3247	Flex LTCG 13.5	UL										
.180	4,6	.400	10,2	M4528	M4529	Flex RLTCG 16	UL	.886	22,5	4,37	111,0	.44	11,2	.25	6,4	1,06	27,0
.260	6,6	.545	13,8	M3249	M3250	Flex LTCG 16	UL										
.250	6,4	.490	12,4	M3478ST	M3479ST	Flex RLTCG 21 ST	UL	1.115	28,3	4,95	125,7	.43*	10,9	.25	6,4	1,30	33,0
.435	11,1	.705	17,9	M3245ST	M3248ST	Flex LTCG 21 ST	UL										
.250	6,4	.490	12,4	M3478	M3479	Flex RLTCG 21	UL	1.115	28,3	5,04	128,0	.52	13,2	.25	6,4	1,30	33,0
.435	11,1	.705	17,9	M3245	M3248	Flex LTCG 21	UL										

Standard colors black and gray.
* .43" (10,9 mm) Shorty LTCG Thread Length.

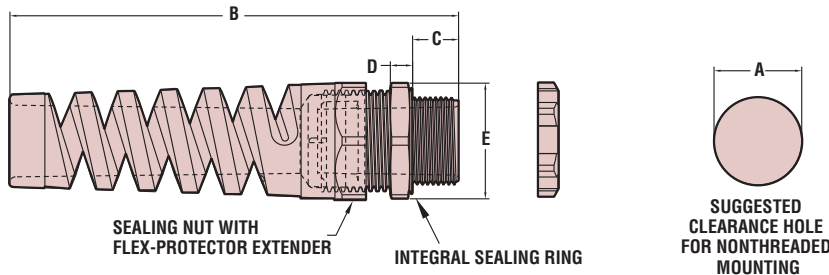

- Flexible Pigtail extender prevents sharp bends and extends cable life.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to .705" (17,9 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-43.
- Consult Heyco for cordgrips molded in other colors.

Material	Nylon 6/6 w/Buna N or TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> UL Listed under Underwriters' Laboratories File E51579 RA Recognized under Components Program of Underwriters' Laboratories File E51579 SP Certified by Canadian Standard Association File 93876C
Flammability Rating	94V-2
Temperature Rating	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)

*Quick
Specs*