



**NO O-RING  
REQUIRED!**

# Heyco® -Tite Liquid Tight Cordgrips


**Straight-Thru, PG Hubs with Integral Sealing Ring**

*The Ultimate in Liquid Tight Strain Relief Protection*

- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to 1.560" (39,6 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-43.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.		DESC.	UL or RA	PART DIMENSIONS									
Minimum		Maximum		Black	Gray			A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Nut Flat Size	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.065	1,7	.210	5,3	<b>M3444</b>	<b>M3445</b>	RLTCG 7	RA	.492	12,5	1.16	29,5	.32	8,1	.21	5,3	.63	16,0
.115	2,9	.250	6,4	<b>M3207</b>	<b>M3208</b>	LTCG 7											
.065	1,7	.230	5,8	<b>M3446</b>	<b>M3447</b>	RLTCG 9	RA	.599	15,2	1.25	31,8	.32	8,1	.21	5,3	.83	21,0
.105	2,7	.315	8,0	<b>M3210</b>	<b>M3211</b>	LTCG 9											
.069	1,8	.260	6,6	<b>M3448</b>	<b>M3449</b>	RLTCG 11	RA	.733	18,6	1.48	37,6	.38	9,7				
NEW!	.230	5,8	400	10,2	<b>M3213GD</b>	-		LTCG 11 ST	.733	18,6	1.41	35,8	.31*	7,9	.21	5,3	.94
					<b>M3213</b>	<b>M3214</b>	LTCG 11	.733	18,6	1.48	37,6	.38	9,7				
.095	2,4	.290	7,4	<b>M4500</b>	<b>M4501</b>	RLTCG 13.5	UL	.804	20,4	1.53	38,9	.41	10,4	.21	5,3	.98	24,9
.170	4,3	.450	11,4	<b>M3216</b>	<b>M3217</b>	LTCG 13.5											
.180	4,6	.400	10,2	<b>M4502</b>	<b>M4503</b>	RLTCG 16	UL	.886	22,5	1.68	42,7	.44	11,2	.25	6,4	1.06	27,0
.260	6,6	.545	13,8	<b>M3219</b>	<b>M3220</b>	LTCG 16											
.250	6,4	.490	12,4	<b>M3454ST</b>	<b>M3455ST</b>	RLTCG 21 ST	UL	1.115	28,3	1.80	45,7	.43**	10,9	.25	6,4	1.30	33,0
.435	11,0	.705	17,9	<b>M3222ST</b>	<b>M3223ST</b>	LTCG 21 ST											
.250	6,4	.490	12,4	<b>M3454</b>	<b>M3455</b>	RLTCG 21	UL	1.115	28,3	1.89	48,0	.52	13,2	.25	6,4	1.30	33,0
.435	11,0	.705	17,9	<b>M3222</b>	<b>M3223</b>	LTCG 21											
.490	12,4	.785	19,9	<b>M4504</b>	<b>M4505</b>	RLTCG 29	UL	1.470	37,3	2.23	56,6	.58	14,7	.30	7,6	1.73	43,9
.590	15,0	1.000	25,4	<b>M3225</b>	<b>M3226</b>	LTCG 29											
.787	20,0	1.020	26,0	<b>M3206</b>	<b>M3205</b>	RLTCG 36	UL	1.875	47,6	2.39	60,7	.47	11,9	.31	7,9	2.05	52,7
.875	22,2	1.260	32,0	<b>M3204</b>	<b>M3203</b>	LTCG 36											
1.000	25,4	1.240	31,5	<b>M3218</b>	<b>M3215</b>	RLTCG 42	UL	2.130	54,1	2.50	63,5	.48	12,2	.36	9,1	2.50	63,5
1.230	31,2	1.560	39,6	<b>M3212</b>	<b>M3209</b>	LTCG 42											
1.160	29,5	1.350	34,3	<b>M3283</b>	<b>M3284</b>	RLTCG 48	UL	2.340	59,4	2.63	66,7	.50	12,7	.42	10,7	2.75	69,9
1.450	36,8	1.560	39,6	<b>M3281</b>	<b>M3282</b>	LTCG 48											

Standard colors black and gray.  
 \*.31" (7,9 mm) Shorty LTCG Thread Length.  
 \*\*.43" (10,9 mm) Shorty LTCG Thread Length.

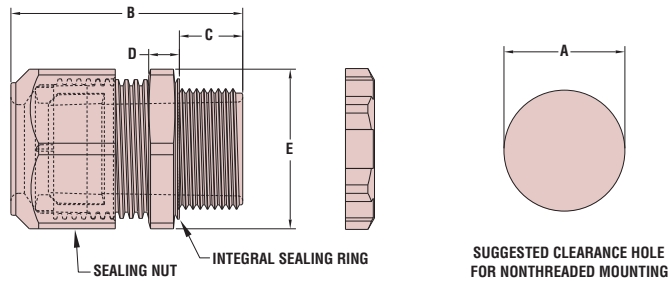

<b>Material</b>	Nylon 6/6 w/Buna N or TPE Sealing Gland
<b>Certifications</b>	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>RA Recognized under the Component Program of Underwriters' Laboratories File E51579</li> <li>SR Certified by Canadian Standard Association File 93876C</li> </ul>
<b>Flammability Rating</b>	94V-2
<b>Temperature Rating</b>	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
<b>IP Rating</b>	IP 68 (70 PSI, 5 BAR)

*Quick Specs*