



Heyco® -Tite Metallic Liquid Tight Cordgrips

NPT Hubs

The Ultimate in Liquid Tight Strain Relief Protection




CABLE DIA. RANGE				PART NO.	DESC.	Gland Color	NPT HUB SIZE	PART DIMENSIONS									
Minimum		Maximum						A	B	C	D		E				
in.	mm.	in.	mm.	Clearance Hole Dia.	Sealing Nut HEX	Body Nut O.D.	Overall Length*	Exposed Length*	in.	mm.	in.	mm.	in.	mm.			
Steel																	
.150	3,8	.250	6,3	9760	CG 50A-250	Red											
.250	6,3	.350	8,9	9761	CG 50A-350	White											
.350	8,9	.450	11,4	9762	CG 50A-450	Blue	1/2	.875	22,2	1.031	26,2	.937	23,8	1.312	33,3		
.450	11,4	.550	14,2	9763	CG 50A-560	Green									.812		
.550	14,0	.650	16,5	9764	CG 50A-650	Brown									20,6		
.150	3,8	.250	6,3	9766	CG 75A-250	Red											
.250	6,3	.350	8,9	9767	CG 75A-350	White											
.350	8,9	.450	11,4	9769	CG 75A-450	Blue	3/4	1.109	28,2	1.031	26,2	1.172	29,8	1.312	33,3		
.450	11,4	.550	14,2	9770	CG 75A-560	Green									.812		
.550	14,0	.650	16,5	9771	CG 75A-650	Brown									20,6		
.650	16,5	.750	19,0	9772	CG 75B-750	Yellow	3/4	1.109	28,2	1.250	31,7	1.187	31,2	1.562	39,7		
.750	19,0	.850	21,6	9773	CG 75B-850	Purple									1.031		
Zinc Die-Cast																	
.190	4,8	.250	6,3	9776	CG 11												
.260	6,6	.375	9,5	9777	CG 12	N/A	1/2	.875	22,2	1.00	25,4	.94	23,8	1.20	30,5		
.375	9,5	.450	11,4	9778	CG 13										.80		

*May vary slightly depending on cable diameter.


Steel:

- Zinc plated steel construction for superior protection of flexible cables.
- Compact design allows fittings to be consecutively ganged—no skipping knockouts—and occupy less real estate.
- Galvanized steel pressure ring prevents distortion of the grommet when the sealing nut is tightened.
- Neoprene rubber grommet ensures a permanent rain-tight seal around the cable.
- Body and sealing nut are made of corrosion resistant machined steel. Zinc plated with special brighteners for an attractive finish.
- Color coded label system identifies the cordgrips by wire range/grommet opening.
- For use in clearance or threaded holes.
- Multiple cable sizes with 1/2" to 3/4" NPT hubs, cover a flexible cord diameter range of .150" (3,8 mm) to .850" (21,6 mm).
- Temperature Rating: 221°F (105°C).

Steel

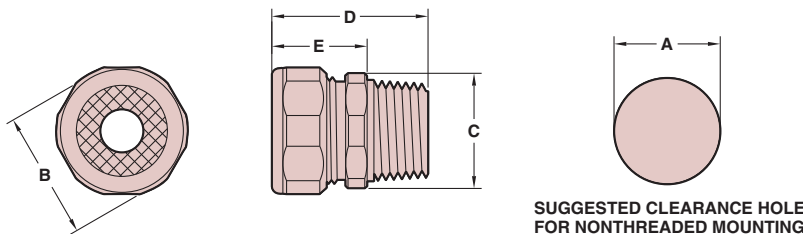

Zinc Die-Cast

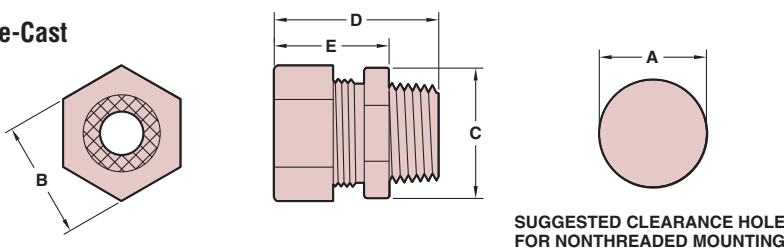

Zinc Die-Cast:

- Zamac #3 construction for protection of flexible cables.
- For use in clearance or threaded holes.
- We recommend using the smallest maximum diameter range cordgrip that will fit your application.
- Temperature Rating: 140°F (60°C).