




Heyco® Wire Protector Terminal Blocks


Screw to Screw—With Wire Protector Flap

- **Wire protector flap** allows the use of STRANDED or SOLID wire with no crimp terminals and no soldering required.
- Allows standardization of the SOLID WIRE Cordset. Input and output wires are always secured with a screw.
- Modern low profile design occupies less real estate.
- No exposed metal parts. "Dead front" designed safety.
- Pressure clamp connectors are supplied in the open position, ready to accept single or multiple solid conductors.
- All sizes are rated at 300 volts (450 volts in Europe).
- Metal parts feature galvanized steel screws and Ni or tin plated brass inserts.
- Available in 94V-0 flame retardant (FR), glass-filled 6/6 Nylon material.
- **Part No. 9299** fixing pin (below) can be used to mount all terminal blocks, with panel thickness limitations—consult Heyco.



| BODY STYLE | WIRE SIZE AWG | mm ² | AMPS North America | POLES | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | | | | | | | | | | | |
|---------------------------------------|------------------|-----------------|--------------------------|-------------------|----------|-------------|--------------|--------------------|------------|-------|-----|------|------|------|-----|-----|-----|------|-----|-----|-----|
| | | | | | Natural | FR White | | Screws (Metric) | A | | B | | C | | D | | E | | F | | |
| | | | | | | | | | (12) Poles | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. |
| 300 Volts Rated (450 Volts in Europe) | | | | | | | | | | | | | | | | | | | | | |
| Low Profile | 12-22 | 2,5 | 20 | 2 12 | 9389 | 9419 | TB 0B-WP-2P | M 2,6 | 3.69 | 93,6 | .64 | 16,2 | .61 | 15,4 | .11 | 2,8 | .32 | 8,0 | .11 | 2,8 | |
| | | | | | 9393 | N/A | TB 0B-WP-12P | | | | | | | | | | | | | | |
| Raised Base | 10-20 | 4 | 30 | 2 3 4 12 | 9394 | N/A | TB 1B-WP-2P | M 3,0 | 4.58 | 116,4 | .73 | 18,6 | .67 | 17,0 | .14 | 3,6 | .39 | 10,0 | .14 | 3,6 | |
| | | | | | 9395 | N/A | TB 1B-WP-3P | | | | | | | | | | | | | | |
| | | | | | N/A | 9426 | TB 1B-WP-4P | | | | | | | | | | | | | | |
| | | | | | 9398 | 9428 | TB 1B-WP-12P | | | | | | | | | | | | | | |
| Raised Base | 8-14 | 6 | 50 | 2 3 12 | 9399 | N/A | TB 2B-WP-2P | M 3,5 | 5.26 | 133,5 | .87 | 22,2 | .82 | 20,8 | .17 | 4,2 | .45 | 11,5 | .15 | 3,7 | |
| | | | | | 9400 | N/A | TB 2B-WP-3P | | | | | | | | | | | | | | |
| | | | | | 9403 | 9433 | TB 2B-WP-12P | | | | | | | | | | | | | | |
| Raised Base | 6-10 | 16 | 55 | 12 | 9408 | 9438 | TB 3B-WP-12P | M 4,0 | 6.89 | 175,0 | .99 | 25,2 | 1.04 | 26,3 | .23 | 5,8 | .59 | 15,0 | .20 | 5,1 | |

Standard color natural. Flame retardant white available at extra charge.

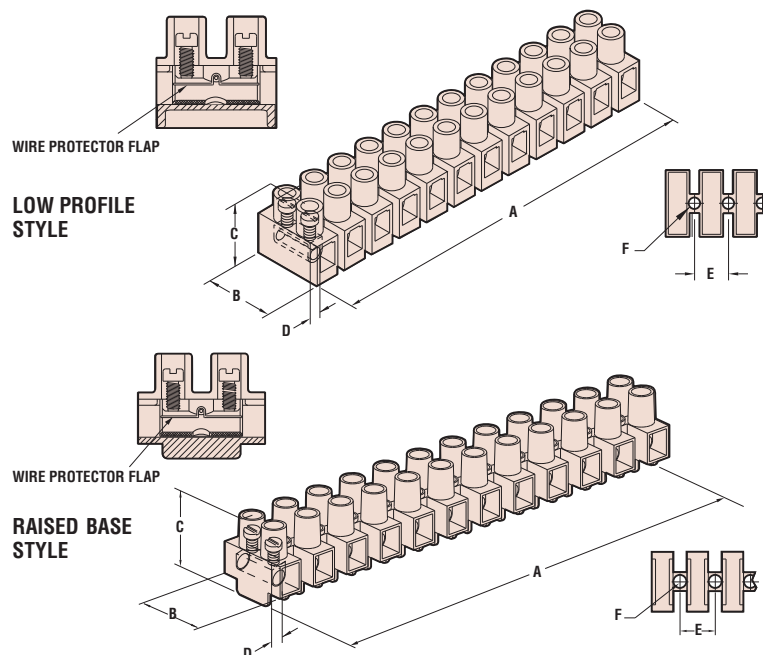

*Quick
Specs*

Materials
Certifications

Flammability Rating
Material Temperature Index

6/6 Nylon and brass

UL Recognized under Component Program of Underwriters' Laboratories to both Canadian and US requirements File E197025

Approved

94V-2

284°F (140°C)