

Klump-Tite[®] structural

Aluminum fasteners with a very large blind side bearing area against the rear sheet. Ideal for use in thin sheet or low strength materials.




Key features and benefits

- Split tail formation spreads the tail bearing load/clamp load on the rear sheet
- Ideal for use in thin sheet materials offering high resistance to pull-out loads
- Multi-grip capability accommodates wide variations in material thickness
- Stem is mechanically locked into body providing very strong, vibration resistant joints
- Visible lock for quick and easy inspection
- Optional underhead washer provides a weather-proof seal

Specifications

Sizes:
3/16" – 1/4"
(4.8 mm – 6.4 mm)
Material:
Aluminum
Head Style:
Protruding

Typical placing sequence

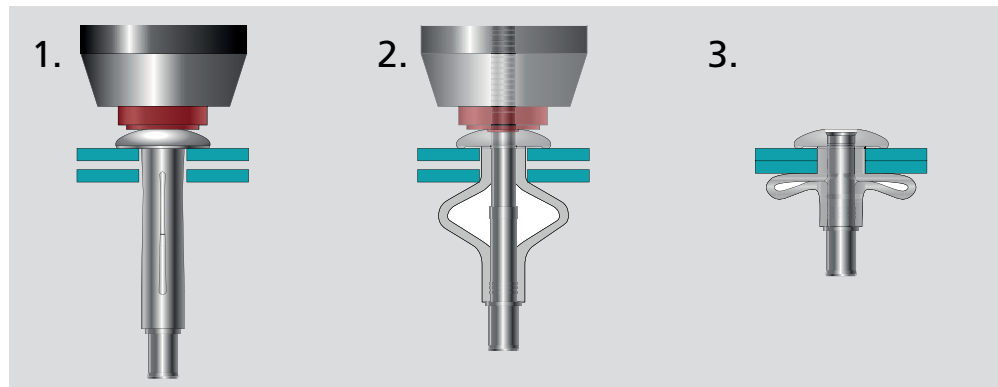

Please visit our website for fastener placing animations and technical data.

Assembly applications

- Container
- Cladding
- Commercial vehicles

Refrigerated truck




Refrigerated truck





English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminum alloy*	Corps: Alliage d'aluminium*	Hülse: Aluminium*	Corpo: Lega di alluminio*	Cuerpo: Aluminio*
Wax lubricated	Lubrifié	Gewachst	Lubrificato	Lubricado
Stem: Aluminum alloy**	Tige: Alliage d'aluminium**	Dorn: Aluminium**	Gambo: Lega di alluminio**	Vástago: Aluminio**
Wax lubricated	Lubrifié	Gewachst	Lubrificato	Lubricado

*: 5056 **: 7075

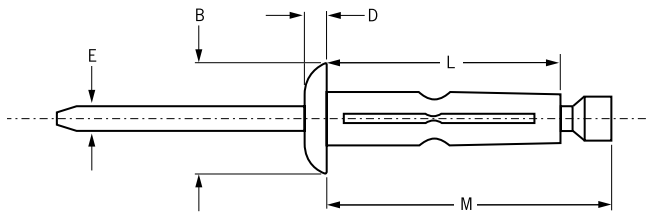

ø					M	øB	D	L	øE			Part No.
	min.	max.	min.	max.								
3/16" (4.8)	.050 (1.27)	.250 (6.35)	.204 (5.18)	.209 (5.31)	1.04 (26.5)	.445 (11.3)	.088 (2.2)	.890 (22.7)	.103 (2.6)	700 (3.11)	450 (2.00)	BAPKTR-06-04
	.187 (4.75)	.375 (9.53)			1.13 (28.7)			.985 (25.1)				BAPKTR-06-06
	.375 (9.53)	.562 (14.27)			1.25 (31.8)			1.120 (28.5)				BAPKTR-06-09
	.562 (14.27)	.750 (19.05)			1.44 (36.6)			1.300 (33.1)				BAPKTR-06-12
1/4" (6.4)	.060 (1.52)	.250 (6.35)	.252 (6.40)	.262 (6.65)	1.30 (33.1)	.560 (14.2)	.113 (2.9)	.925 (23.5)	.136 (3.5)	1250 (5.56)	700 (3.11)	BAPKTR-08-04
	.187 (4.75)	.375 (9.53)			1.42 (36.1)			1.050 (26.7)				BAPKTR-08-06

dimensions in inches and (mm) / en pouces et (millimètre) / alle Maße in Zoll und (mm) / in pollici e (millimetri) / en pulgadas y (milímetros)
1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos

Note:

External stem locking feature requires special nose piece. / Le verrouillage extérieur de la tige nécessite d'un nez spécial. / Die Restdornverriegelung erfordert ein spezielles Mundstück. / Funzione di bloccaggio esterno del gambo richiede particolare nasello. / El bloqueo mecánico del vástago requiere de una boquilla especial.

Option:

A synthetic rubber washer can be ordered to fit under protruding head fasteners e.g.: BAPKTR-06W-06
Une rondelle en caoutchouc disposée sous la tête peut être commandée ex : BAPKTR-06W-06
Flachrundkopf mit Unterkopf-Gummidichtung ist ebenfalls verfügbar, z.B. BAPKTR-06W-06
Testa tonda con una guarnizione di gomma e disponibile, p. e. BAPKTR-06W-06
Para el sellado de la cabeza hay una version con junta de goma sintética, p.ej: BAPKTR-06W-06

