


# Flat Point Screw


For jig and fixture work. Available in low carbon steel, not hardened, with black oxide finish or 303 stainless.

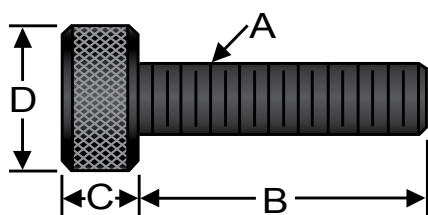

Steel P/N	Stainless P/N	Thread (A)	Thread Length (B)	Head Thickness (C)	Head Dia (D)
FPS-0S	SFPS-0S	10-32	1 1/2	3/16	5/8
FPS-0	SFPS-0	10-32	2	5/8	5/8
FPS-1S	SFPS-1S	10-24	1 1/2	3/16	5/8
FPS-1	SFPS-1	10-24	2	5/8	5/8
FPS-2S	SFPS-2S	1/4-20	1 1/2	7/32	11/16
FPS-2	SFPS-2	1/4-20	2 1/2	7/32	11/16
FPS-3SS	SFPS-3SS	5/16-18	1 1/2	7/32	11/16
FPS-3S	SFPS-3S	5/16-18	1 3/4	1/4	3/4
FPS-3	SFPS-3	5/16-18	2 1/4	1/4	3/4
FPS-3L	SFPS-3L	5/16-18	3	3/4	3/4
FPS-4S	SFPS-4S	3/8-16	2	7/8	7/8
FPS-4	SFPS-4	3/8-16	2 1/2	5/16	7/8
FPS-4L	SFPS-4L	3/8-16	3	7/8	7/8
FPS-5	SFPS-5	1/2-13	3	1	1

# Dog Point Screw

Used where permanent location of one part in relation to another is desired.  
Point is usually spotted in hole or slot. Heat treated steel with black oxide finish.

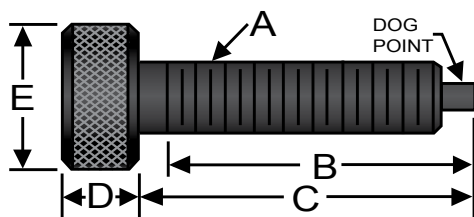

Steel P/N	Thread (A)	Thread Length (B)	Stud Length (C)	Head Thickness (D)	Head Dia (E)
DPS-101	10-24	3/4	1	1/4	3/4
DPS-102	10-24	1 1/4	1 1/2	1/4	3/4
DPS-103	10-24	1 3/4	2	1/4	3/4
DPS-104	1/4-20	1 1/4	1 1/2	5/16	1
DPS-105	1/4-20	1 3/4	2	5/16	1
DPS-106	1/4-20	2 1/4	2 1/2	5/16	1
DPS-107	5/16-18	1 1/4	1 1/2	3/8	1 1/8
DPS-108	5/16-18	1 3/4	2	3/8	1 1/8
DPS-109	5/16-18	2 1/4	2 1/2	3/8	1 1/8
DPS-110	3/8-16	1 3/4	2	7/16	1 1/4
DPS-112	3/8-16	2 3/4	3	7/16	1 1/4
DPS-113	1/2-13	2 3/4	3	1/2	1 1/4