




ALL NEW PRODUCTS!

Heyco® Threaded Plugs for Straight Threaded Ports

With Integral Sealing Ring
For SAE Threaded Ports
 12-Point Socket Head with Slot

SAE THREADED PORT SIZE	PART NO. Red	DESCRIPTION	PART DIMENSIONS							
			A 12-Point Socket Size	B Depth		C Head Height		D Shoulder Diameter		
				in.	mm.	in.	mm.	in.	mm.	
7/16-24	G5420	PSAE 7/16-24	3/8	.34	8,6	.26	6,6	.66	16,8	
7/16-20	G5421	PSAE 7/16-20								
1/2-20	G5422	PSAE 1/2-20	7/16	.34	8,6	.30	7,6	.73	18,5	
9/16-18	G5423	PSAE 9/16-18	1/2	.36	9,1	.30	7,6	.80	20,3	
3/4-16	G5424	PSAE 3/4-16	11/16	.41	10,4	.31	7,9	1.02	25,9	
7/8-14	G5425	PSAE 7/8-14	13/16	.53	13,5	.31	7,9	1.16	29,5	
1-1/16-12	G5426	PSAE 1-1/16-12	1	.61	15,5	.31	7,9	1.45	36,8	
1-5/16-12	G5427	PSAE 1-5/16-12	1-1/4	.61	15,5	.33	8,4	1.74	44,2	
1-5/8-12	G5428	PSAE 1-5/8-12	1-9/16	.61	15,5	.33	8,4	2.17	55,1	
1-7/8-12	G5429	PSAE 1-7/8-12	1-7/8	.62	15,7	.34	8,6	2.42	61,5	

Standard color red.

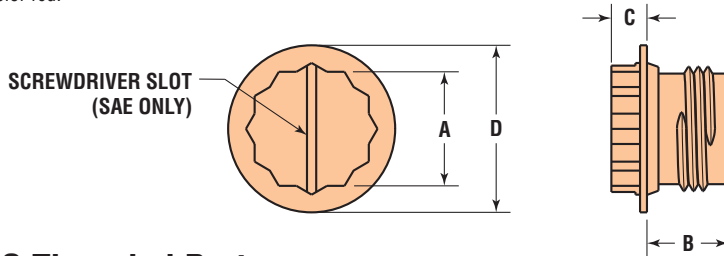

For ISO Threaded Ports
 12-Point Socket Head


ISO THREADED PORT SIZE	PART NO. Green	DESCRIPTION	PART DIMENSIONS							
			A 12-Point Socket Size	B Depth		C Head Height		D Shoulder Diameter		
				in.	mm.	in.	mm.	in.	mm.	
10 x 1.5	G5431	PISO 10	10	.33	8,4	.33	8,4	.65	16,5	
12 x 1.5	G5432	PISO 12	12	.41	10,4	.34	8,6	.73	18,5	
14 x 1.5	G5433	PISO 14	12	.41	10,4	.38	9,7	.81	20,6	
18 x 1.5	G5434	PISO 18	16	.41	10,4	.44	11,2	.97	24,6	
22 x 1.5	G5435	PISO 22	20	.41	10,4	.44	11,2	1.12	28,4	
27 x 2	G5436	PISO 27	24	.41	10,4	.44	11,2	1.36	34,5	

Standard color green.

Material	PSAE HDPE	Material	PISO Polypropylene
Maximum Temperature Rating	215°F (102°C)	Maximum Temperature Rating	250°F (121°C)



- Provide a dual, positive seal on SAE and ISO straight-threaded ports.
- **Integral Sealing Ring** seats into the bevel of the threaded opening to prevent oil or fluid leakage.
- Lip on the flange compresses against the mounting hole surface, keeping contaminants from the spot face.
- Suitable for gasketing (optional).
- Slotted, 12-point head for screwdriver (SAE only), socket or wrench tightening.
- Round socket pattern Head.

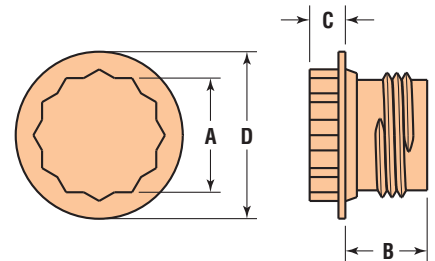

Quick Specs