




ALL NEW PRODUCTS!

HEYClip™ SunRunner 4™ Cable Clip

Double-Compression Design for Panels up to .250" (6,4 mm) Thick

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (4) Wires	PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum in.	Maximum mm.	Minimum in.	Maximum mm.				A x B in.	mm.	C in.	mm.
.125	3,2	.250	6,4	.20" (5,1 mm)- .30" (7,6 mm) each cable	S6400	SunRunner 4™ 100 Pack	1.34 x .50	34,0 x 12,7	.36	9,1
					S6440	SunRunner 4™ Bulk				

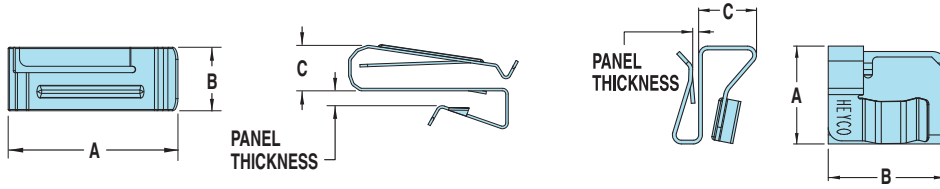

SunRunner 4™


SunRunner® 90°

ALL NEW PRODUCTS!

HEYClip™ SunRunner® 90° Cable Clip

Double-Compression, Right Angle Design

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (1) Wire	PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum in.	Maximum mm.	Minimum in.	Maximum mm.				A x B in.	mm.	C in.	mm.
.055	1,4	.125	3,2	.20" (5,1 mm)- .30" (7,6 mm) each cable	S6406	SunRunner 90° 100 Pack	.65 x .78	16,5 x 19,8	.39	9,9
					S6446	SunRunner 90° Bulk				

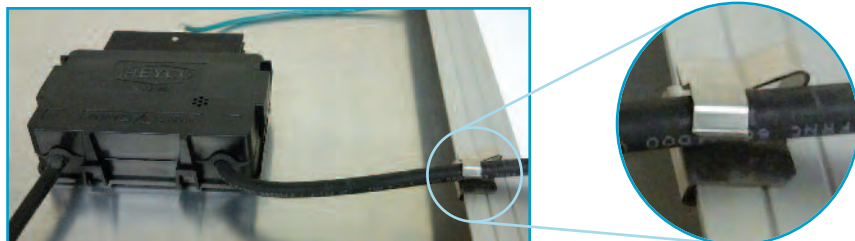

Material
 SunRunner 4 – .020" thick heat treated 410 stainless steel
 SunRunner 90° – .025" thick 304 stainless steel



- Designed to hold up to (4) 12 gauge USE-2 or (4) 10 gauge PV-1000V solar wires.
- Also for use with other types of cables from .20" (5,1 mm) to .30" (7,6 mm) in diameter.
- Designed to provide a better method for PV module wire management and may be used whenever multiple cable management is needed.
- Smooth clip edges prevent damage to cable insulation.
- SunRunner 4 Cable Clip is designed to accommodate thicker racking systems up to .250" (6,4 mm) thick.
- Constructed from heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- For additional HEYClips in Stainless Steel see pages 1-13 and 1-14.



- SunRunner 90° Cable Clip is designed to mount at a 90° angle to the original SunRunner. The SunRunner 90° will accommodate a single cable from .20" (5,1 mm) to .30" (7,6 mm).
- SunRunner 90° is designed for use with PV modules mounted in the landscape mode. PV modules with shorter than normal junction box cables cannot be dressed out to the sides of the module. The SunRunner 90° will allow the junction box cables to be run to the adjacent modules across the short side of the PV module frame.

Quick Specs