



Heyco® Universal Bushings


Mounting Hole Diameter Range: .500" (12,7 mm) to 3.000" (76,2 mm)

- Flexible shutters adjust to accommodate and support any shape from .125" (3,2 mm) to a maximum inside diameter of 2.470" (62,7 mm).
- Absorb vibration and cushion and insulate cables, tubing, hoses or shafts.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Fingertip pressure snap-locks the bushing into its mounting hole.

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
in.	mm.	Black	White		Maximum Inside Diameter		A Head Diameter		B Overall Height	
					in.	mm.	in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)										
.500	12,7	2055	2056	UB 500	.312	7,6	.600	15,2	.385	9,8
.625	15,9	2077	2076	UB 625	.437	11,1	.730	18,5	.406	10,3
.750	19,1	2089	2085	UB 750	.500	12,7	.844	21,4	.390	9,9
.812	20,6	2106	2107	UB 812	.500	12,7	.890	22,6		
.875	22,2	2119	2129	UB 875	.562	14,3	.937	23,8	.453	11,5
		2118	-	UB 875-112*						
1.000	25,4	2137	2138	UB 1000	.750	19,1	1.063	27,0	.453	11,5
1.093	27,8	2157	2162	UB 1093	.812	20,6	1.160	29,5		
1.187	30,2	2153	2154	UB 1187	.950	24,1	1.250	31,8	.465	11,8
1.250	31,8	2155	2156	UB 1250	1.015	25,8	1.314	33,4		
1.375	34,9	2184	2185	UB 1375	1.000	25,4	1.490	37,8	.490	12,4
		2187	-	UB 1375-1750	1.000	25,4	1.750	44,5		
1.500	38,1	2213	2214	UB 1500	1.062	26,9	1.610	40,9		
1.750	44,5	2298	2299	UB 1750	1.375	34,9	1.870	47,5		
2.000	50,8	2422	2423	UB 2000	1.640	41,6	2.130	54,0		
Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)										
2.500	63,5	2440	2441	UB 2.500	1.970	50,0	2.630	66,8	.750	19,05
3.000	76,2	2460	2463	UB 3.000	2.470	62,7	3.150	80,0		

Standard colors black and white. Consult Heyco for other colors.

*UB 875-112 inside diameter adjusts for 1/8" to 5/8" cables; UB 875 adjusts for 3/16" to 9/16" cables.

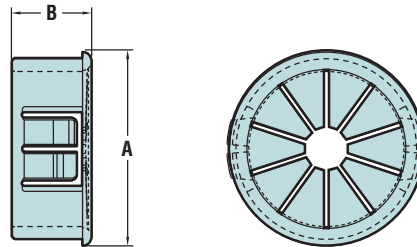

Quick Specs

Material Nylon 6/6
Certifications Recognized under the Component Program of Underwriters' Laboratories, File E15331
 Certified by Canadian Standards Association, File 8919
Flammability Rating 94V-2
Material Temperature Index 257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)